




# GREAVES

## NEUTRAL BARS

### MULTI-CIRCUIT NEUTRAL BARS

For use as neutral bar or grounding bar  
 Easy to install, reuseable  
 Feedwire can be located in any wire-position  
 Standard screws are plated steel, slotted, headless  
 Mounting holes provided in specified positions

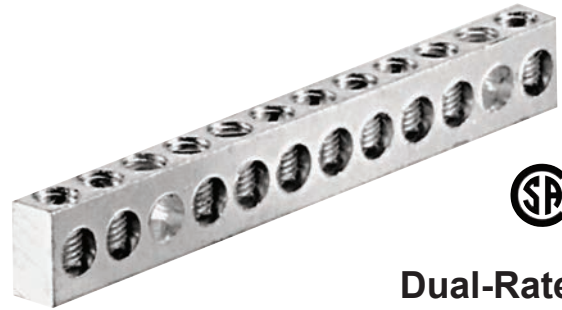

**Dual-Rated**  
600V

### ALUMINUM NEUTRAL BARS

Solid-bar high-strength 6061-T6 aluminum alloy  
 Plated for low surface resistance

### ANB SERIES

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	WIRE CIRCUITS	DIMENSIONS			MOUNTING HOLES		CTN QTY	EST. SHIPPING	
				L	W	H	NO.	POSITION		WEIGHT (lbs)	UNIT
26102	ANB4-4-1	#4-14AWG	4	1.57			1	3	100	2.16	CTN
26103	ANB4-4-3	#4-14AWG	4	1.88	.31	.44	2	1 & 4	100	3.16	CTN
26105	ANB4-5-2	#4-14AWG	5	2.25	.31	.44	2	OUTBOARD	100	3.16	CTN
26107	ANB4-6-1	#4-14AWG	6	2.25			1	4	100	3.16	CTN
26108	ANB4-6-3	#4-14AWG	6	2.56	.31	.44	2	4 & 7	100	4.16	CTN
26109	ANB4-7-3	#4-14AWG	7	2.87			2	3 & 7	100	4.16	CTN
26110	ANB4-9-2	#4-14AWG	9	3.50			2	OUTBOARD	50	2.66	CTN
26111	ANB4-10-2	#4-14AWG	10	3.81			2	OUTBOARD	50	3.16	CTN
26112	ANB4-12-2	#4-14AWG	12	4.43	.31	.44	2	OUTBOARD	50	3.66	CTN
26115	ANB4-15-2	#4-14AWG	15	5.37			2	OUTBOARD	50	4.66	CTN
26116	ANB4-20-2	#4-14AWG	20	6.93			2	OUTBOARD	50	6.16	CTN
26100	ANB4-190*	#4-14AWG	190	60	.31	.44	-	-	10	12.50	CTN
26121	ANB2-10-3	#2-14AWG	10	4.12	.37	.50	2	3 & 11	50	6.16	CTN
26132	ANB20-3-3	2/0-14AWG	3	2.95			2	2 & 4	25	3.16	CTN
26133	ANB20-6-2	2/0-14AWG	6	5.00	.56	.75	2	OUTBOARD	25	3.66	CTN

Other sizes available. Contact factory.

Hole Spacing: ANB4 = .312, ANB2 = .34, ANB20 = .625

Mounting Bolt Size: ANB4 = #10, ANB2 = 3/16, ANB20 = 3/16

### COPPER NEUTRAL BARS

Solid-bar high-conductivity pure electrolytic copper  
 Plain copper finish


### CNB SERIES

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	WIRE CIRCUITS	DIMENSIONS			MOUNTING HOLES		CTN QTY	EST. SHIPPING	
				L	W	H	NO.	POSITION		WEIGHT (lbs)	UNIT
26204	CNB4-4-2	#4-14AWG	4	1.88			2	OUTBOARD	100	6.16	CTN
26205	CNB4-5-2	#4-14AWG	5	2.25	.31	.44	2	OUTBOARD	100	7.16	CTN
26206	CNB4-6-2	#4-14AWG	6	2.56			2	OUTBOARD	50	4.16	CTN
26212	CNB4-12-2	#4-14AWG	12	4.43			2	OUTBOARD	50	7.16	CTN
26213	CNB4-13-3	#4-14AWG	13	4.74	.31	.44	2	3 & 13	50	8.16	CTN
26200	CNB4-190*	#4-14AWG	190	60	.31	.44	-	-	10	20.00	CTN
26223	CNB2-6-2	#2-14AWG	6	3.25	.37	.62	2	2 & 7	25	12.7	CTN

Other sizes available. Contact factory.

Hole Spacing: CNB4 = .312, CNB2 = .397. Mounting Bolt Size: CNB4 = #10, CNB2 = 3/16

\* Supplied with screws unassembled

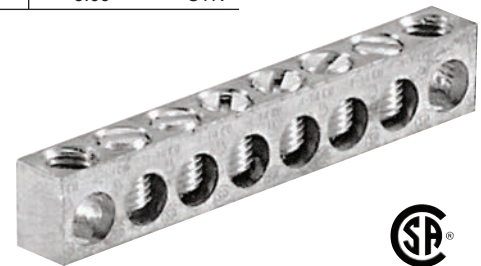

For copper cable  
600V



Dual-Rated

CU9AL

## NON-INSULATED BLOCKS

Aluminum alloy 6061-T6  
Prefilled with oxide inhibitor

### PD SERIES



Wire entry  
optional from  
either side

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	WIRE CIRCUITS	DIMENSIONS			ALLEN HEX	CTN QTY	EST. SHIPPING	
				LENGTH	WIDTH	HEIGHT			WEIGHT (lbs)	UNIT
13500	PD 250-4		4	3.50				6	2.15	CTN
13505	PD 250-6	250 MCM-#6	6	6.25	.87	1.13	5/16	6	3.15	CTN
13510	PD 250-8		8	7.00				6	4.15	CTN
13515	PD 350-4		4	4.25				3	1.75	CTN
13520	PD 350-6	350 MCM-#6	6	6.38	1.00	1.44	5/16	3	2.65	CTN
13525	PD 350-8		8	8.50				3	3.35	CTN
13542	PD 600-4		4	5.40				3	2.25	CTN
13543	PD 600-6	600 MCM-#4	6	8.25	1.25	1.62	5/16	3	3.75	CTN
13544	PD 600-8		8	11.00				3	4.45	CTN
13545	PD 750-4		4	6.00				2	2.60	CTN
13550	PD 750-6	750-250 MCM	6	8.96	1.44	2.00	3/8	2	3.92	CTN
13555	PD 750-8		8	11.81				1	2.60	EA

Other sizes available. Also available with insulated mounting positions. Consult factory.


Not recommended for use with fine-stranded, flexible cables.

For flex/extra-flex high-strand wire, first install a PT-FX Shoo-Pin™ Adapter.

## Shoo-pin™ Adapters for flex cable terminations

For reliable termination of high-strand flexible cables into set-screw type lugs, terminate the flex cable with a PT-FX Shoo-Pin Adapter.

- For dual-rated or CU set-screw lugs
- Also for PBS/USA/USAD insulated connectors

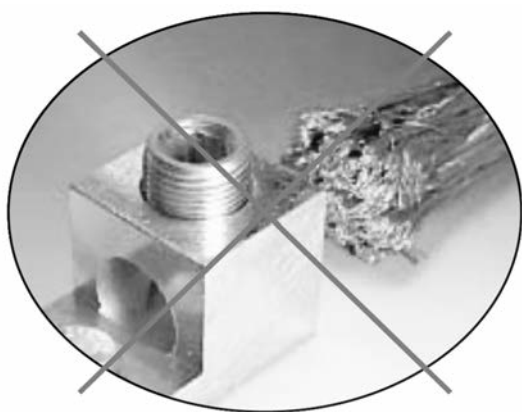

GREAVES EXCLUSIVE

