



POWER DISTRIBUTION

INSULATED MOUNTABLE

Isolated bolt holes for mounting to trough, panel or wireway

Most sizes available from stock

Insulated with rugged high-dielectric rubber/vinyl coating

Saves installation time—no taping

Pre-filled with oxide-inhibitor

Plugs marked with connector max wire size for easy identification

6061-T6 high strength aluminum alloy

For flex/extra-flex high-strand wire, first install a PT-FX Shoo-Pin™ Adapter

Copper wire only for #14-#6 AWG

One wire per port

Dual-Rated

90°C

CU9AL

600V



USA-M SERIES

One-Side Entry

All wires enter same side.

NAED NUMBER	CATALOG NUMBER	WIRE PORTS	WIRE RANGE	ALLEN HEX	DIMENSIONS		MOUNTING BOLT SIZE	EST. SHIPPING	
					LENGTH	HEIGHT		WEIGHT (lbs)	UNIT
17142	USA 4-2M	2			1.97			0.15	EA
17144	USA 4-4M	4	#4-14	1/8	2.82	1.45	#10	0.22	EA
17146	USA 4-6M	6			3.65			0.28	EA
17122	USA 2-2M	2			1.99			0.15	EA
17124	USA 2-4M	4	#2-14	5/32	2.87	1.45	#10	0.22	EA
17126	USA 2-6M	6			3.69			0.28	EA
17102	USA 2/0-2M	2			3.01			0.26	EA
17103	USA 2/0-3M	3			3.69			0.31	EA
17104	USA 2/0-4M	4	2/0-14	7/32	4.36	1.50	#12	0.36	EA
17105	USA 2/0-5M	5			4.74			0.43	EA
17106	USA 2/0-6M	6			5.41			0.50	EA
17152	USA 250-2M	2			3.85			0.52	EA
17153	USA 250-3M	3			4.71			0.65	EA
17154	USA 250-4M	4	250-#6	5/16	5.57	2.10	1/4	0.78	EA
17155	USA 250-5M	5			6.43			0.96	EA
17156	USA 250-6M	6			7.29			1.01	EA
17132	USA 350-2M	2			4.57			0.85	EA
17133	USA 350-3M	3			5.62			1.04	EA
17134	USA 350-4M	4	350-#6	5/16	6.67	2.50	5/16	1.22	EA
17135	USA 350-5M	5			7.72			1.37	EA
17136	USA 350-6M	6			8.77			1.65	EA
17162	USA 600-2M	2			5.63			1.08	EA
17163	USA 600-3M	3			7.11			1.65	EA
17164	USA 600-4M	4	600-#4	5/16	8.47	2.90	5/16	1.95	EA
17165	USA 600-5M	5			9.83			2.22	EA
17166	USA 600-6M	6			11.18			2.63	EA
17172	*USA 750-2M	2			6.19			1.41	EA
17173	*USA 750-3M	3			7.75			2.61	EA
17174	*USA 750-4M	4	750-250	5/16	9.18	3.60	5/16	3.04	EA
17175	*USA 750-5M	5			10.60			3.44	EA
17176	*USA 750-6M	6			12.03			3.91	EA

* 750 MCM size not UL Listed.

MOUNTABLE



PATENTED

End positions are modified and insulated for mounting bolts



POWER DISTRIBUTION

INSULATED MOUNTABLE

Isolated bolt holes for mounting to trough, panel or wireway

Most sizes available from stock

Insulated with rugged high-dielectric rubber/vinyl coating

Saves installation time—no taping

Pre-filled with oxide-inhibitor

Plugs marked with connector max wire size for easy identification

6061-T6 high strength aluminum alloy

For flex/extra-flex high-strand wire, first install a PT-FX Shoo-Pin™ Adapter

Copper wire only for #14-#6 AWG

One wire per port

Dual-Rated

90°C

CU9AL

600V




USAD-M SERIES

Two-Side Entry

NAED NUMBER	CATALOG NUMBER	WIRE PORTS	WIRE RANGE	ALLEN HEX	DIMENSIONS		MOUNTING BOLT SIZE	EST. SHIPPING	
					LENGTH	HEIGHT		WEIGHT (lbs)	UNIT
17242	USAD 4-2M	2			1.97			0.15	EA
17244	USAD 4-4M	4	#4-14	1/8	2.82	1.45	#10	0.30	EA
17246	USAD 4-6M	6			3.65			0.40	EA
17222	USAD 2-2M	2			1.99			0.16	EA
17224	USAD 2-4M	4	#2-14	5/32	2.87	1.45	#10	0.27	EA
17226	USAD 2-6M	6			3.69			0.31	EA
17202	USAD 2/0-2M	2			3.01			0.26	EA
17203	USAD 2/0-3M	3			3.69			0.33	EA
17204	USAD 2/0-4M	4			4.36			0.40	EA
17205	USAD 2/0-5M	5			5.05			0.44	EA
17206	USAD 2/0-6M	6	2/0-14	7/32	5.72	1.50	#12	0.51	EA
17207	USAD 2/0-7M	7			6.37			0.65	EA
17208	USAD 2/0-8M	8			7.03			0.85	EA
17209	USAD 2/0-9M	9			7.76			0.92	EA
17200	USAD 2/0-10M	10			8.40			1.00	EA
17252	USAD 250-2M	2			3.85			0.57	EA
17253	USAD 250-3M	3			4.71			0.72	EA
17254	USAD 250-4M	4			5.57			0.82	EA
17255	USAD 250-5M	5			6.43			0.94	EA
17256	USAD 250-6M	6	250-#6	5/16	7.29	2.10	1/4	1.10	EA
17257	USAD 250-7M	7			8.15			1.31	EA
17258	USAD 250-8M	8			9.01			1.50	EA
17259	USAD 250-9M	9			9.87			1.64	EA
17250	USAD 250-10M	10			10.73			1.89	EA
17232	USAD 350-2M	2			4.57			0.92	EA
17233	USAD 350-3M	3			5.62			1.10	EA
17234	USAD 350-4M	4			6.67			1.35	EA
17235	USAD 350-5M	5			7.72			1.50	EA
17236	USAD 350-6M	6	350-#6	5/16	8.77	2.50	5/16	1.68	EA
17237	USAD 350-7M	7			9.82			2.08	EA
17238	USAD 350-8M	8			10.87			2.30	EA
17239	USAD 350-9M	9			11.92			2.34	EA
17230	USAD 350-10M	10			12.97			2.63	EA
17262	USAD 600-2M	2			5.63			1.50	EA
17263	USAD 600-3M	3			7.11			1.83	EA
17264	USAD 600-4M	4			8.47			2.18	EA
17265	USAD 600-5M	5			9.83			2.69	EA
17266	USAD 600-6M	6	600-#4	5/16	11.18	2.90	5/16	2.81	EA
17267	USAD 600-7M	7			12.53			3.11	EA
17268	USAD 600-8M	8			13.88			3.66	EA
17269	USAD 600-9M	9			15.23			3.88	EA
17260	USAD 600-10M	10			16.58			4.28	EA
17272	*USAD 750-2M	2			6.19			2.21	EA
17273	*USAD 750-3M	3			7.75			2.66	EA
17274	*USAD 750-4M	4			9.18			3.26	EA
17275	*USAD 750-5M	5			10.60			3.69	EA
17276	*USAD 750-6M	6	750-250	5/16	12.03	3.60	5/16	4.23	EA
17277	*USAD 750-7M	7			13.46			4.68	EA
17278	*USAD 750-8M	8			14.88			5.11	EA
17279	*USAD 750-9M	9			16.30			5.56	EA
17270	*USAD 750-10M	10			17.73			5.91	EA

Wire entry optional from either side.

MOUNTABLE

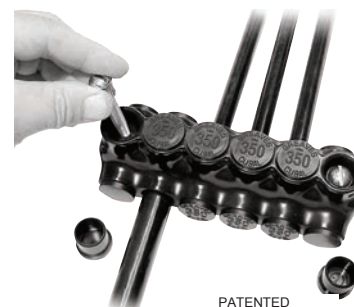

End positions are modified and insulated for mounting bolts

* 750 MCM size not UL Listed.