




FLEXIBLE BRAID

FB SERIES

Fine-strand flat-woven tin-plated flexible copper braid
 Use to absorb expansion, misalignment, motion, or vibration of equipment
 Use for bonding or grounding jumpers
 Use to wrap HV connections

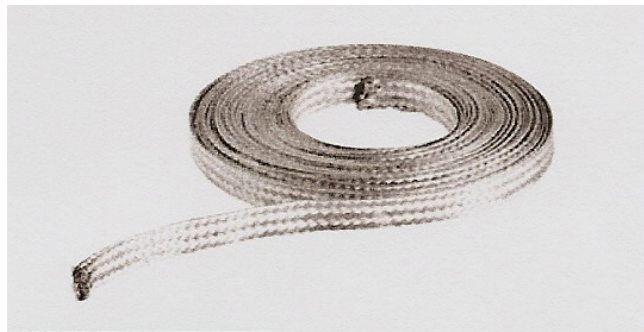

CATALOG NUMBER	CIRCULAR MIL AREA	STRANDING	EQUIV. WIRE SIZE (APPROX)	AMP RATING (NOMINAL)		DIMENSIONS (IN)	
				INDOOR	OUTDOOR	W	TH
FB60	9.6 kcmil	48-8/36	#10 AWG	40	55	1/2	1/32
FB90	24.1 kcmil	24-10/30	#6 AWG	72	90	1/2	3/32
FB200	77 kcmil	1 X 24-32/30	#1 AWG	200	245	1	1/8
FB300	154 kcmil	2 X 24-32/30	3/0 AWG	340	405	1	3/16
FB400	231 kcmil	3 X 24-32/30	4/0 AWG	360	430	1	5/32

Available in 10FT coils
 Also available in bulk quantities

10/06 rev 5/07