




WISE GRIP CONNECTOR

GVC SERIES

APPLICATION


Splice or tap
 Hot-stick installable
 For grounding to flat bar – accepts one or two conductors
 For use with copper conductors only

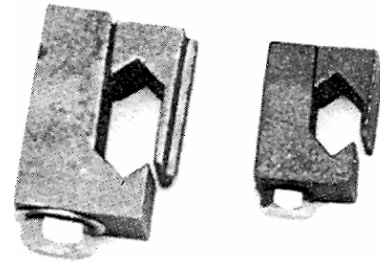**DESIGN**

Lay-in or Side-entry for easy installation
 Long-thread, guide-rail design for reliability
 Heavy construction provides excellent heat dissipation
 V-groove aligns conductors
 Interlock design for resistance to vibration

MATERIALS OF CONSTRUCTION

High-strength silicon bronze body
 Stainless-steel hex head bolt
 Available with shear-head bolt to assure proper torque and tamper-proof installation

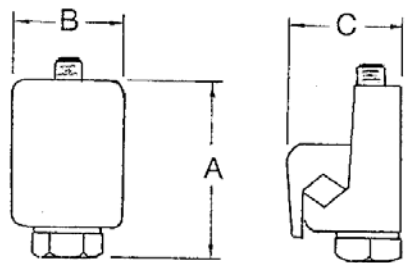

CATALOG NO.	CONDUCTOR RANGE		DIMENSIONS (IN) APPROX			BOLT (IN)	
	MAX 2 WIRES	MIN 1 WIRE	A	B	C	SIZE	HEAD
	GVC3	6SOL-8STR	6SOL-8STR	7/8	5/8	3/4	1/4
GVC5	4SOL-4STR	4SOL-4STR	1-1/8	3/4	13/16	5/16	9/16
GVC7	2SOL-3STR	2SOL-3STR	1-3/8	13/16	15/16	5/16	9/16
GVC10	2/0SOL-1/0STR	1SOL/2STR	1-5/8	13/16	1	5/16	9/16
GVC11	3/0SOL-2/0STR	3/0SOL-2/0STR	2	7/8	1 1/4	3/8	9/16
GVC12	4/0SOL-4/0STR	4/0SOL-4/0STR	2-1/8	1	1-3/8	3/8	9/16
GVC15	350 KCMIL	350 KCMIL	3	1-1/4	1 3/4	1/2	3/4

Available with shear-head bolt; add "-H" to Catalog No.

Available tin-plated; add "-P" to Catalog No.