



GREAVES

SERVICE ENTRANCE

PARALLEL ALUMINUM CLAMPS

Splice or tap for service entrance connection
Aluminum body with galvanized or stainless steel hardware

PAC SERIES

| NAED NUMBER | CATALOG NUMBER | CONDUCTOR RANGE | | FIG. | CTN QTY |
|---|-------------------|-----------------|---------|------|---------|
| | | MAIN | TAP | | |
| 15101 | PAC 4010 | 4/0 - 1/0 | 1/0 - 8 | 1 | 25 |
| 15102 | PAC 4040 | 4/0 - 2 | 4/0 - 2 | 2 | 20 |
| Pre-filled with oxide-inhibitor and individually bagged. | | | | | |
| 15111 | PAC 4010-X | 4/0 - 1/0 | 1/0 - 8 | 1 | 20 |
| 15112 | PAC 4040-X | 4/0 - 2 | 4/0 - 2 | 2 | 10 |

Bronze clamps available, consult factory.

Dual-Rated

Bug•Lug™ oxide-inhibitor is recommended for all aluminum terminations



Figure 1



Figure 2

PARALLEL ALUMINUM CLAMPS


Splice or tap for service entrance connection
Extruded aluminum body
High-stress anodized aluminum bolt with integral washer
Pre-filled with oxide-inhibitor and individually bagged

PAC-X SERIES

| NAED NUMBER | CATALOG NUMBER | CONDUCTOR RANGE | | BOLT SIZE | DIMENSIONS | | CTN QTY |
|-------------|----------------|--------------------------|--------------------------|-----------|------------|------|---------|
| | | GROOVE A | GROOVE B | | L | W | |
| 15210 | PAC10-X | 1/0STR-6SOL 1/0-6ACSR | 1/0STR-6SOL 1/0-6ACSR | 3/8 | 1.31 | 1.61 | 20 |
| 15211 | PAC20-X | 2/0STR-6SOL 2/0-6ACSR | 2/0STR-6SOL 2/0-6ACSR | 3/8 | 1.37 | 1.61 | 20 |
| 15212 | PAC40-X | 4/0STR-2SOL 4/0-4ACSR | 4/0STR-2SOL 4/0-4ACSR | 3/8 | 1.50 | 1.97 | 20 |

Dual-Rated

RUS Approved

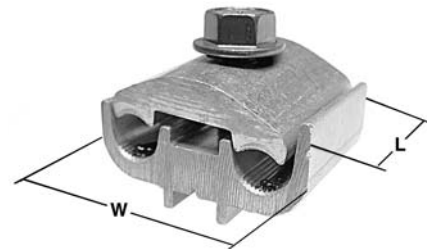



POWER DISTRIBUTION

BUG•BITES™

Insulation Piercing Connectors

Eliminates need for conductor insulation stripping

No taping required after installation

For copper to copper, copper to aluminum, or aluminum to aluminum applications

For use on insulated conductor only



Dual-Rated

CU9AL
600V 90°C

IPC SERIES

| NAED NUMBER | CATALOG NUMBER | WIRE RANGE | | NO BOLTS. | CTN QTY |
|-------------|----------------|------------|-----------|-----------|---------|
| | | MAIN | TAP | | |
| 13110 | IPC 1002 | #1/0 - 8 | 2 - 8 | 1 | 12 |
| 13107 | *IPC 4006 | #4/0 - 4 | 6 - 14 | 1 | 12 |
| 13108 | *IPC 4020 | #4/0 - 2 | 2/0 - 6 | 1 | 12 |
| 13109 | *IPC 2540 | 250 - 1 | 4/0 - 6 | 1 | 6 |
| 13113 | IPC 3540 | 350 - 4/0 | 4/0 - 10 | 1 | 6 |
| 13114 | IPC 3535 | 350 - 4/0 | 350 - 4/0 | 2 | 6 |
| 13116 | †IPC 5012 | 500 - 250 | 10 - 12 | 1 | 4 |
| 13104 | *IPC 5025 | 500 - 250 | 250 - 4 | 1 | 4 |
| 13105 | *IPC 5050 | 500 - 300 | 500 - 250 | 1 | 1 |
| 13106 | *IPC 7550 | 750 - 500 | 500 - 350 | 1 | 1 |

*600 Volts, balance 300 Volts (for 480V grounded Y systems)

† Not CSA certified



CAUTION

Use Bug•Bites on insulated cable only!
Do not install on bare cable.

GUTTER TAP CONNECTORS

High strength aluminum alloy 6061-T6, tin-plated

Main conductor remains continuous

Tap parallel or perpendicular to main

Reusable

GP SERIES


| NAED NUMBER | CATALOG NUMBER | CONDUCTOR RANGE | | CTN QTY |
|-------------|----------------|-----------------|----------|---------|
| | | MAIN | TAP | |
| 13117 | GP 2* | 2 - 12 | 4 - 14 | 24 |
| 13118 | GP 10 | 1/0 - 2 | 1/0 - 14 | 12 |
| 13119 | GP 250 | 250 - 1/0 | 250 - 6 | 12 |
| 13121 | GP 350 | 350 - 4/0 | 350 - 6 | 6 |
| 13122 | GP 500 | 500 - 350 | 500 - 2 | 6 |

*GP2 has slotted screws.



Dual-Rated

CU9AL
600V 90°C

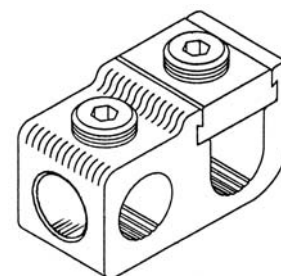

For copper-to-copper, copper-to-aluminum,
aluminum-to-aluminum

Snap-on insulating covers for use with GP connectors

GPC SERIES

| NAED NUMBER | CATALOG NUMBER | FOR USE WITH CONNECTOR | CTN QTY |
|-------------|----------------|------------------------|---------|
| 13137 | GPC 2 | GP2 | 12 |
| 13138 | GPC 10 | GP10 | 6 |
| 13140 | GPC 250 | GP250 | 6 |
| 13141 | GPC 350 | GP350 | 3 |
| 13142 | GPC 500 | GP500 | 3 |

600V 90°C

For indoor use only

