



## COMPRESSION



### LONG BARREL COPPER LUGS

Long barrel for heavy duty applications  
Produced from high conductivity seamless copper tubing  
Tin plated to provide corrosion resistance  
Marked with die index and color coded

For copper cable

600 V\*\*

### L-N SERIES

### Two-Hole NEMA


NAED NUMBER	CATALOG NUMBER	WIRE SIZE	BOLT		U-TYPE DIE		CTN QTY	EST. SHIPPING	
			SIZE	SPACING	COLOR	INDEX		WEIGHT (lbs)	UNIT
33069	L 6N	#6			BLUE	7/347		1.34	CTN
33049	L 4N	#4			GRAY	8/346	20	1.10	CTN
33029	L 2N	#2	1/2	1 3/4	BROWN	10		1.60	CTN
33019	L 1N	#1			GREEN	11/375		1.90	CTN
40000	L 10N	1/0			PINK	12/348		2.91	CTN
40005	L 20N	2/0			BLACK	13		3.50	CTN
40010	L 30N	3/0	1/2	1 3/4	ORANGE	14	25	4.01	CTN
40015	L 40N	4/0			PURPLE	15		5.24	CTN
40020	L 250N	250			YELLOW	16		6.12	CTN
40025	L 300N	300			WHITE	17/298	12	3.41	CTN
40030	L 350N	350			RED	18/324	12	4.61	CTN
40035	L 400N	400	1/2	1 3/4	BLUE	19/470	6	2.36	CTN
40040	L 500N	500			BROWN	20/299	6	3.89	CTN
40045	*L 600N	600			GREEN	22/472	6	5.52	CTN
40050	*L 750N††	750			BLACK	24/473	3	3.30	CTN
40055	*L 1000N††	1000			WHITE	27	1	1.78	EA
40056	*L 1250N††	1250	1/2	1 3/4	YELLOW	29	1	2.05	EA
40057	*L 1500N††	1500			GREEN	31	1	2.51	EA
40059	*L 2000N††	2000			BROWN	34	1	3.53	EA

†† All Lugs through 750 MCM have a 1 3/4" or less tang width to accommodate side by side NEMA stud spacing.

\*\* May be used for applications up to 35 KV when proper installation and insulation procedures are employed.

\* Size not UL.

†† Size not CSA.

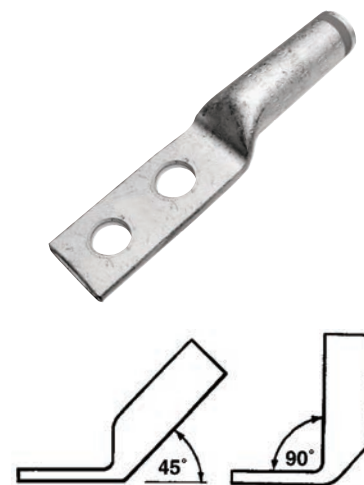

- For angle lugs consult factory for availability.
- For blank tangs consult factory for availability.

### LONG BARREL STACKING COPPER LUGS

Long barrel for heavy duty applications  
Produced from high conductivity seamless copper tubing  
Tin plated to provide corrosion resistance  
Marked with die index and color coded  
Designed specifically to fit with Greaves LN Series lugs

For copper cable  
600 V\*\*

### SL-N SERIES

### Two-Hole NEMA

NAED NUMBER	CATALOG NUMBER	WIRE SIZE	BOLT		U-TYPE DIE		EST. SHIPPING	
			SIZE	SPACING	COLOR	INDEX	WEIGHT (lbs)	UNIT
71801	SL 20N	2/0			BLACK	13	0.18	EA
71802	SL 30N	3/0			ORANGE	14	0.20	EA
71803	SL 40N	4/0	1/2	1 3/4	PURPLE	15	0.24	EA
71804	SL 250N	250			YELLOW	16	0.30	EA
71805	SL 300N	300			WHITE	17/298	0.33	EA
71806	SL 350N	350			RED	18/324	0.43	EA
71807	SL 400N	400	1/2	1 3/4	BLUE	19/470	0.44	EA
71808	SL 500N	500			BROWN	20/299	0.64	EA
71809	*SL 600N	600			GREEN	22/472	0.96	EA
71811	††*SL 750N	750	1/2	1 3/4	BLACK	24/473	1.15	EA
71812	*SL 1000N	1000			WHITE	27	1.20	EA


\*\* May be used for applications up to 35 KV when proper installation and insulation procedures are employed.

†† All lugs through 750 MCM have a 1 3/4" or less tang width to accommodate side by side NEMA stud spacing.

\* Size not UL.



SL-N fits on  
L-N straight lugs

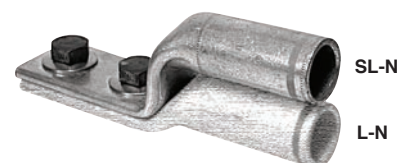

**CAUTION**  
May not fit competitor lugs.  
Greaves L-N Series lugs are recommended to make a stacking set.