

COMPRESSION


Shoo-in™ FLEX-CABLE CONNECTORS REFERENCE INFORMATION SIZING GUIDE

High-strand flexible cables are often utilized in environments that involve motion or vibration. Applications include locomotive, mining, marine, welding machinery, wind power turbines, temporary power generators, and transformers.

High-strand flexible cables are available in a variety of classes and styles, such as welding cable, rope cable, diesel-locomotive cable (DLO) and others. Each style has a different nominal cable/conductor diameter which can vary from manufacturer to manufacturer, from lot to lot, and even within a manufacturing lot.

This chart can assist in selection of connectors for use on high-strand, flexible cables. Locate your cable across the top, move down to your cable size, and move to the lefthand column for your "FX GUIDE." Then for a lug or splice series, use your FX GUIDE to select your specific lug or splice. An alternative is to select your FX GUIDE according to the conductor O.D. information on the chart; when measuring your cable diameter, include only the bundle of conductors (not the jacket). This will help select an FX lug or splice with appropriate barrel size and flare.

For example, 535kcmil DLO cable (1325/24 stranding) indicates an FX GUIDE of "535FX"; for a long-barrel 2-hole NEMA lug, select Cat. No. L535NFX.

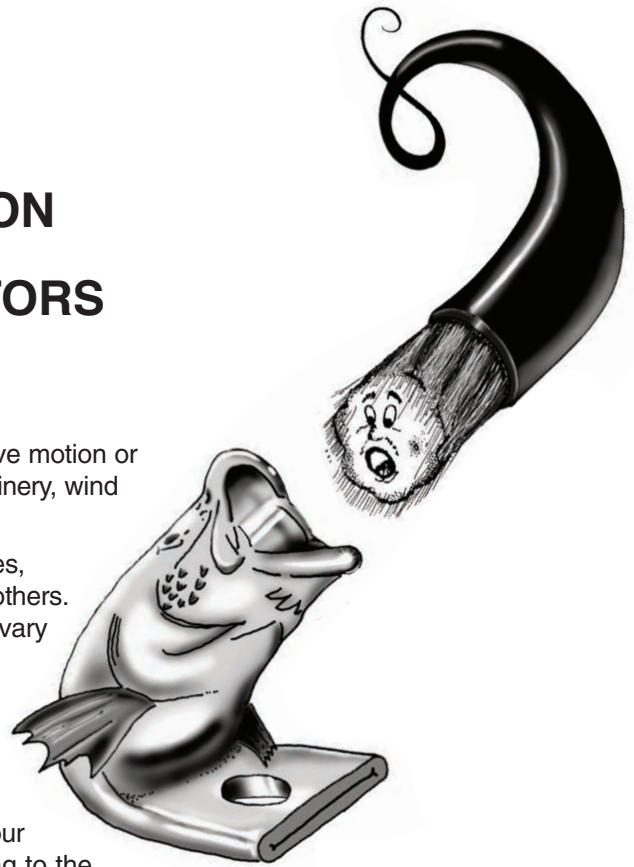


SIZING GUIDE for FX COMPRESSION LUGS for DLO and FLEX CABLE CABLE DIMENSIONS – REFERENCE INFORMATION									
FX CAT. NO. GUIDE	CLASS I-MODIFIED (DIESEL-LOCOMOTIVE CABLE)			CLASS H (ROPE)		CLASS M (WELD)		REFERENCE CLASS B (COMM'L)	
	APPROX (AWG)KCMIL	STRANDS (#/AWG)	COND. O.D.	AWG	O.D.	AWG	O.D.	AWG	O.D.
25FX	(6)26	61/24	.207	#7	.188	#7	.196	#6	.184
42FX	(4)42	91/24-105/24	.263	#5	.237	#5	.240	#4	.232
50FX	(3)50.5	125/24	.288	#4	.266	#4	.269	#2	.292
60FX	(2)60.6	150/24	.313	#2	.336	#2	.337	#1	.332
90FX	(1)90.9	225/24	.380	#1	.378	#1	.376	1/0	.373
111FX	(1/0)111.1	275/24	.409	1/0	.424	1/0	.423	2/0	.418
131FX	(2/0)131.3	325/24	.449	2/0	.477	--	--	3/0	.470
181FX	(3/0)181.8	450/24	.540	3/0	.536	2/0	.508	4/0	.528
222FX	(4/0)222.2	550/24	.573	4/0	.602	3/0	.576	250	.575
250FX	250	637/24	.682	250	.653	250	.713	350	.681
262FX	262.6	650/24	.620	250	.653	4/0	.645	300	.630
313FX	313.1	775/24	.688	300	.716	250	.713	350	.681
373FX	373.7	925/24	.774	350	.773	300	.768	500	.814
444FX	444.4	1100/24	.840	400	.909	350	.825	600	.893
535FX	535.3	1325/24	.908	500	.923	400	.901	700	.964
646FX	646.4	1600/24	1.034	700	1.106	600	1.084	800	1.031
777FX	777.7	1925/24	1.123	800	1.180	700	1.183	1000	1.152
929FX	929.2	2299/24	1.230	1000	1.320	900	1.331	1250	1.289
1111FX	1111.1	2745/24	1.360	1250	1.477	1000	1.404	1500	1.412

COMPRESSION Shoo-pin™

For copper cable
600V
105°C

FLEX-CABLE COPPER COMPRESSION ADAPTERS

All-copper compression adapters
For reliable termination of highly stranded flexible copper cable
Used in locomotive, mining, marine, wind power, and machinery applications
Fits into mechanical set-screw type connectors in panels, transformers, machinery
Recommended for use on flex/extra-flex high-strand wire with PBS, USA,
USAD Series insulated connector
Rated for full ampacity of incoming conductor
Features flared Shoo-in™ barrel-opening for easy cable insertion
Fabricated of wrought copper with pin of Class B stranded
copper conductor
Insulating covers are provided

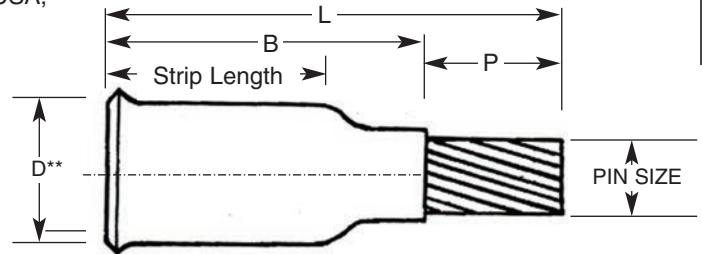

PT-FX SERIES

NAED NUMBER	CATALOG NUMBER	FLEX CABLE OR CODE AWG CONDUCTOR	PIN SIZE	NOMINAL DIMENSIONS (IN)				CABLE STRIP LENGTH	U-TYPE DIE*			EST. SHIPPING	
		DLO CABLE FLEX CABLE		B	P	L	D**		COLOR	INDEX	# CRIMPS	WEIGHT (lbs)	UNIT
54236	PT25FX6†	61/24 (#6)	#6 AWG	1.5	1.1	2.40	0.30	3/4	BLUE	7/374	1	0.05	EA
55424	PT42FX4	91/24-105/24 (#4)	#4 AWG	1.5	1.1	2.45	0.42	7/8	GRAY	8/346	1	0.06	EA
55602	PT60FX2	125/24-150/24 (#2)	#2 AWG	1.6	1.1	2.45	0.47	1	BROWN	10	1	0.08	EA
55901	PT90FX1	175/24-225/24 (#1)	#1 AWG	1.7	1.1	2.45	0.52	1	GREEN	11/375	1	0.10	EA
55111	PT111FX10	275/24 (1/0)	1/0 AWG	1.8	1.1	2.87	0.56	1 1/8	PINK	12/348	1	0.10	EA
55131	PT131FX20	325/24 (2/0)	2/0 AWG	2.1	1.2	2.97	0.62	1 1/4	BLACK	13	1	0.13	EA
55181	PT181FX30	450/24 (3/0)	3/0 AWG	2.2	1.3	3.10	0.69	1 1/4	ORANGE	14	1	0.16	EA
55222	PT222FX40	550/24 (4/0)	4/0 AWG	2.3	1.3	3.30	0.75	1 1/4	PURPLE	15	1	0.22	EA



NAED NUMBER	CATALOG NUMBER	FLEX CABLE	PIN SIZE	DIMENSIONS (IN)				CABLE STRIP LENGTH	U-TYPE DIE*			EST. SHIPPING	
				B	P	L	D**		COLOR	INDEX	# CRIMPS	WEIGHT (lbs)	UNIT
55250	PT250FX250	250 kcmil FLEX CLASS G 259 CLASS H 427	250 kcmil	2.3	1.40	3.40	0.75	1 3/8	YELLOW	16	2	0.26	EA
55262	PT262FX250	262.6 kcmil FLEX 250 FLEX CLASS I, K, M	250 kcmil	2.3	1.40	3.50	0.81	1 3/8	WHITE	17/298	2	0.26	EA
55313	PT313FX350	313.1 kcmil (775/24) (300 kcmil NOM)	350 kcmil	2.3	1.50	3.65	0.88	1 3/8	RED	18/324	2	0.38	EA
PT373	PT373FX350	373.7 kcmil (925/24) (350 kcmil NOM)	350 kcmil	2.7	1.50	3.95	1.06	1 3/8	BLUE	19/470	2	0.41	EA
55444	PT444FX500	444.4 kcmil (1100/24) (450 kcmil NOM)	500 kcmil	2.8	1.75	4.30	1.19	1 1/2	BROWN	20/299	2	0.65	EA
55535	PT535FX500	535.3 kcmil (1325/24) (500 kcmil NOM)	500 kcmil	3.1	1.75	4.40	1.24	1 1/2	GREEN	22/472	2	0.66	EA
55646	PT646FX600	646 kcmil (1600/24) (600 kcmil NOM)	600 kcmil	3.3	1.90	4.70	1.32	1 3/4	BLACK	24/473	2	0.83	EA
55777	PT777FX750	777.7 kcmil (1925/24) (750 kcmil NOM)	750 kcmil	3.3	2.01	5.00	1.50	2	YELLOW	936	2	1.21	EA



Custom pin lengths and diameters available. Consult factory.
For DLO sizes 929.2, 1111.1 and larger, consult factory for price and delivery.
For solid pin, consult factory.
For tin plating add suffix "P" to catalog number.

* Installation tool: Greenlee HKL 1232.
** Add 1/8" for insulating cover.
† Size not CSA.
For aluminum cable, see PT, PTA, PTO Series. See page 39.