



# GREAVES

## SERVICE ENTRANCE

### PARALLEL ALUMINUM CLAMPS

Splice or tap for service entrance connection

Cast aluminum body with galvanized or stainless steel hardware

#### PAC SERIES

NAED NUMBER	CATALOG NUMBER	CONDUCTOR RANGE		FIG.	CTN QTY	EST. SHIPPING	
		MAIN	TAP			WEIGHT (lbs)	UNIT
15101	PAC 4010	4/0 - 1/0	1/0 - 8	1	25	6.51	CTN
15102	PAC 4040	4/0 - 2	4/0 - 2	2	20	9.06	CTN

Pre-filled with oxide-inhibitor and individually bagged.

15111	PAC 4010-X	4/0 - 1/0	1/0 - 8	1	20	7.26	CTN
15112	PAC 4040-X	4/0 - 2	4/0 - 2	2	10	5.76	CTN

Bronze clamps available, consult factory.

#### Dual-Rated

Bug•Lug™ oxide-inhibitor is recommended for all aluminum terminations



Figure 1



Figure 2

### PARALLEL ALUMINUM CLAMPS

Splice or tap for service entrance connection


Extruded aluminum body

High-stress anodized aluminum bolt with integral washer

Pre-filled with oxide-inhibitor and individually bagged

#### PAC-X SERIES

NAED NUMBER	CATALOG NUMBER	CONDUCTOR RANGE		BOLT SIZE	DIMENSIONS		CTN QTY	EST. SHIPPING	
		GROOVE A	GROOVE B		L	W		WEIGHT (lbs)	UNIT
15211	PAC20-X	2/0STR-6SOL 2/0-#6ACSR	2/0STR-6SOL 2/0-#6ACSR	3/8	1.37	1.61	10	2.66	CTN
15212	PAC40-X	4/0STR-2SOL 4/0-#4ACSR	4/0STR-2SOL 4/0-#4ACSR	3/8	1.50	1.97	10	4.06	CTN

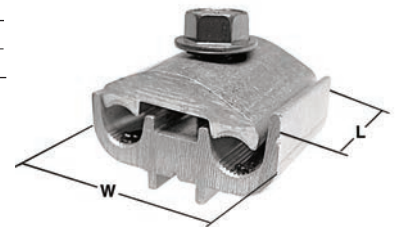

#### Dual-Rated

RUS Approved