




SERVICE ENTRANCE

H-TYPE ALUMINUM COMPRESSION TAPS

Aluminum compression tap or splice connector for service drop, secondary or primary tap
 Seven Connector Program accommodates a wide range of wire sizes
 Accepts combinations of alum-alum or alum-copper conductors
 Manufactured of high-conductivity aluminum extrusion
 Pre-coated with oxide-inhibitor on contact surfaces
 Marked with wire size, die code, and crimp locations
 Install with standard hydraulic compression tool and die indicated
 Fold-in tabs provide positive interlock as die closes

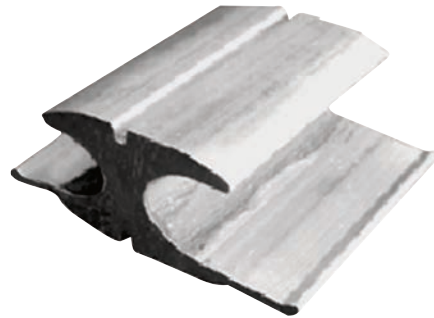

SEH SERIES

NAED NUMBER	CATALOG NUMBER	CODE	WIRE TYPE	STANDARD COND		COMPACT		DIE INDEX	CTN QTY	EST. SHIPPING	
				SIDE A	SIDE B	SIDE A	SIDE B			WEIGHT (lbs)	UNIT
15312	SEH1-22	1	ACSR	1-6	1-6	2-6	2-6	O	20	1.6	CTN
			STR	2-6	2-6	2-6	2-6				
			SOL	2-6	2-6	--	--				
15322	SEH2-201	2	ACSR	1/0-3	2-6	1/0-2	1-6	O	20	1.6	CTN
			STR	2/0-3	1-6	2/0-2	1-6				
			SOL	2/0-1	1/0-6	--	--				
15333	SEH3-301	3	ACSR	2/0-1/0	2-6	3/0-2/0	1-6	D	10	3.2	CTN
			STR	3/0-2/0	1-6	3/0	1-6				
			SOL	4/0-3/0	1/0-6	--	--				
15343	SEH4-3020	4	ACSR	2/0-1	2/0-1	3/0-1/0	2/0-1/0	D	10	3.5	CTN
			STR	3/0-1	2/0-1	3/0-1/0	3/0-1/0				
			SOL	4/0-2/0	3/0-2/0	--	--				
15354	SEH5-401	5	ACSR	4/0-3/0	2-6	4/0	1-6	D	10	1.0	CTN
			STR	4/0	1-6	250-4/0	1-6				
			SOL	300-250	1/0-6	--	--				
15364	SEH6-4020	6	ACSR	4/0-3/0	2/0-1	4/0-3/0	2/0-1/0	D	10	1.3	CTN
			STR	4/0-3/0	2/0-1	250-4/0	3/0-1/0				
			SOL	--	3/0-2/0	--	--				
15374	SEH7-4040	7	ACSR	4/0-3/0	4/0-3/0	4/0-3/0	4/0-3/0	D	10	1.6	CTN
			STR	4/0-3/0	4/0-3/0	250-4/0	250-4/0				
			SOL	--	--	--	--				

Sizes shown are the most typical. Other sizes available, consult factory.