



SERVICE ENTRANCE

COMPRESSION SPLICES ALUMINUM SLEEVES – NYLON INSULATED

Aluminum compression splices for overhead distribution service drop
 Accepts combinations of alum-alum or alum-copper conductors
 Tough nylon insulation is anchored to jacket to resist installing tool pressure
 Manufactured of high-conductivity aluminum extrusion
 Pre-filled with oxide-inhibitor
 End caps keep barrels clean and are easily pierced with conductor
 Marked with wire size, wire color code, die code, and crimp locations
 Install with standard hydraulic compression tool with
 appropriate 5/8 or 840 die
 Meets ANSI C119.4 Class A-3 requirements

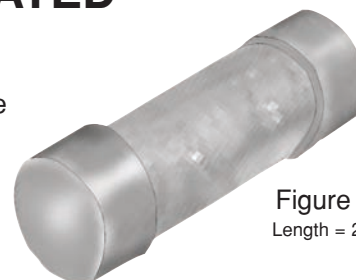


Figure 1
Length = 2⁷/₈



Figure 2
Length = 5¹/₂

SEN SERIES

NAED NUMBER	CATALOG NUMBER	END A			END B			DIE	FIG.	CTN QTY	EST. SHIPPING	
		ACSR	AL & CU	COLOR	ACSR	AL & CU	COLOR				WEIGHT (lbs)	UNIT
15466	SEN66	6	6STR-4SOL	BLUE	6	6STR-4SOL	BLUE	5/8 BG U-BG	1	50	4.5	CTN
15446	SEN46	4	4STR-2SOL	ORANGE	6	6STR-4SOL	BLUE			50	4.0	CTN
15444	SEN44		4STR-2SOL		ORANGE	50	3.5			CTN		
15416	SEN16	2	2-1STR	RED	6	6STR-4SOL	BLUE			50	3.0	CTN
15414	SEN14		2-1STR		ORANGE	50	2.4			CTN		
15411	SEN11		2-1STR		RED	50	2.3			CTN		
15410	SEN101	1/0, 1	1/0STR	YELLOW	2	2-1STR	RED			25	7.0	CTN
15430	SEN304	--	3/0STR	BLACK	4	4STR-2SOL	ORANGE	840	2	25	6.0	CTN
15420	SEN204	--	2/0STR	GRAY	4	4STR-2SOL	ORANGE			25	5.8	CTN
15422	SEN2020	--	2/0STR			2/0STR	GRAY			25	5.5	CTN
15440	SEN404	--	4/0STR	PINK	4	4STR-2SOL	ORANGE			10	2.4	CTN
15441	SEN401		4/0STR		2	1-2STR	RED			10	2.1	CTN
15442	SEN4020		4/0STR		--	2/0STR	GRAY			10	2.2	CTN
15445	SEN4040		4/0STR		--	4/0STR	PINK	10	1.8	CTN		

Sizes shown are the most typical. Other sizes available upon request.