



UNDERGROUND DIRECT BURIAL

UF SPLICE KIT

Submersible Splice Kit for UF Underground Feeder Cable

Convenient - for splice/repair of jacketed Underground Feeder Cable

UL Listed - for direct burial splicing of jacketed UF Cable #14 - 8 AWG
 - 2/C plus ground, or 3/C plus ground
 - copper wires only
 - 600 Volts max


Faster - easier-to-use with only one piece of tubing to shrink

Watertight - sealant activated with heat-shrinking process

Tough - heavy-wall adhesive-lined heat-shrink tubing

UV Resistant - for above-ground applications

Direct Burial
600V CU

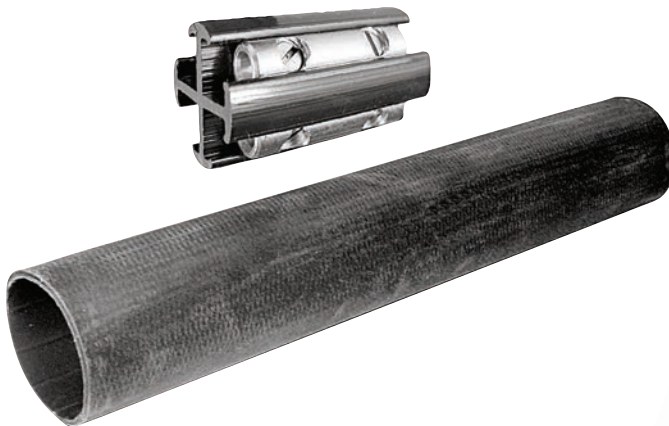

Kit Contains

- Connector with 4 tubular brass splice couplers (screw type)
- 8-inch length of heavy-wall adhesive-lined heat-shrinkable tubing
- Installation instruction and wire stripping guide on package

Display packaged - Card 12 X 5 X 1½ inches in bag

Installation - Use soft-flame torch or heat gun to shrink tubing and melt adhesive.

UFK SERIES

Splice Kit

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	QUANTITY	EST. SHIPPING	
				WEIGHT (lbs)	UNIT
80300	UFK 8	UF jacketed copper cable #8-14 AWG 2/C plus ground or 3/C plus ground	12	3.0	CTN