




GROUND-PRES™

IRREVERSIBLE COMPRESSION SYSTEM

Irreversible compression "C tap" connectors for direct burial grounding grid applications

Direct Burial

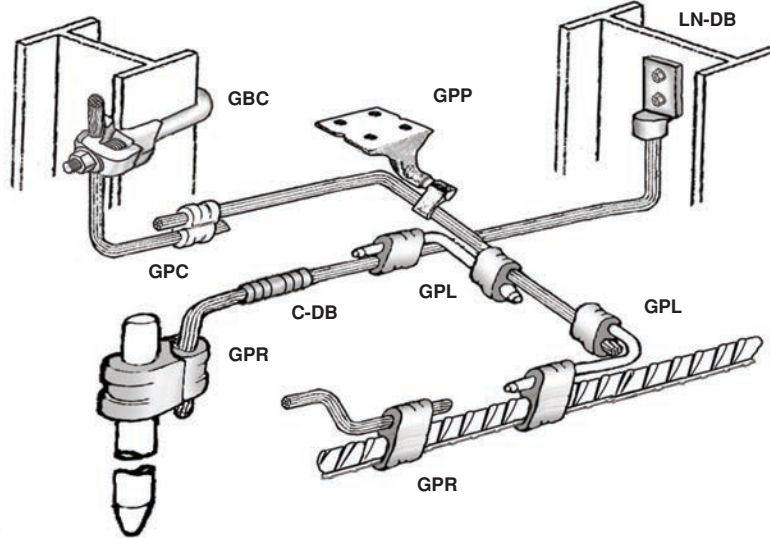

Tap or lap-splice for wire-to-wire connections
GPC SERIES

CAUTION
Use of wash-off resistant oxide-inhibitor is recommended with all underground joints.

| NAED NUMBER | CATALOG NUMBER | WIRE RANGE | | DIE | CTN QTY | EST. SHIPPING | |
|-------------|----------------|------------|---------------|-----------|---------|---------------|------|
| | | MAIN | TAP | | | WEIGHT (lbs) | UNIT |
| 12946 | GPC46 | #4STR-6SOL | #6STR-6SOL | BG or 5/8 | 50 | 2.3 | CTN |
| 12944 | GPC44 | | #4STR-4SOL | | 50 | 2.4 | CTN |
| 12926 | GPC26 | #2STR-2SOL | #6STR-8SOL | C | 25 | 2.3 | CTN |
| 12922 | GPC22 | | #2STR-2SOL | | 25 | 2.3 | CTN |
| 12920 | GPC2020 | 2/0-1/0STR | 2/0STR-1/0SOL | O | 10 | 4.1 | CTN |
| 12923 | GPC2520 | 250-3/0 | 2/0-6SOL | 997 | 10 | 2.3 | CTN |
| 12924 | GPC2525 | | 250-3/0 | | 10 | 2.6 | CTN |
| 12942 | GPC4020 | 4/0-3/0SOL | 2/0STR-1/0SOL | F or D3 | 10 | 3.8 | CTN |
| 12940 | GPC4040 | | 4/0STR-3/0SOL | | 10 | 3.3 | CTN |



Tap or lap-splice for ground rod-to-wire or wire-to-wire connections
GPR SERIES

| NAED NUMBER | CATALOG NUMBER | MAIN | | TAP | DIE | CTN QTY | EST. SHIPPING | |
|-------------|----------------|----------|----------------|---------------|-----|---------|---------------|------|
| | | ROD | WIRE | WIRE | | | WEIGHT (lbs) | UNIT |
| 12822 | GPR122 | 1/2, 5/8 | 250MCM-1/0 STR | #2STR-4SOL | 997 | 10 | 3.2 | CTN |
| 12823 | GPR1220 | | | 2/0-1/0STR | | 10 | 3.0 | CTN |
| 12824 | GPR1225 | | | 250MCM-3/0STR | | 10 | 2.6 | CTN |
| 12834 | GPR342 | 5/8, 3/4 | 500-250MCM | #2STR-4SOL | 998 | 10 | 4.7 | CTN |
| 12835 | GPR3420 | | | 2/0-1/0STR | | 10 | 4.6 | CTN |
| 12836 | GPR3425 | | | 250MCM-3/0STR | | 10 | 4.2 | CTN |
| 12837 | GPR3450 | | | 500MCM3/0STR | | 5 | 5.0 | CTN |



Perpendicular configuration for ground rod-to-wire or wire-to-wire connections
GPL SERIES

| NAED NUMBER | CATALOG NUMBER | A | | B | DIE | | CTN QTY | EST. SHIPPING | |
|-------------|----------------|----------|--------------|------------|-----|-----|---------|---------------|------|
| | | ROD | WIRE | WIRE | A | B | | WEIGHT (lbs) | UNIT |
| 12722 | GPL22 | — | #2STR-6SOL | #2STR-6SOL | O | O | 4 | 1.8 | CTN |
| 12723 | GPL122 | 1/2, 5/8 | 250MCM-1STR | #2STR-6SOL | 997 | O | 4 | 2.3 | CTN |
| 12724 | GPL1225 | | 250MCM-#2STR | 250MCM-#2 | 997 | 997 | 2 | 1.7 | CTN |
| 12734 | GPL342 | 5/8, 3/4 | 500-250MCM | #2STR-6SOL | 998 | O | 2 | 2.2 | CTN |
| 12735 | GPL3425 | | | 250MCM-#2 | 998 | 997 | 2 | 2.2 | CTN |
| 12736 | GPL3450 | | | 500-250MCM | 999 | 999 | 2 | 3.6 | CTN |



Hydraulic tool required for installation for all except GPL22.