



## GROUNDING


### I-BEAM GROUNDING CLAMPS – ALUMINUM

Use to connect grounding electrode conductor to structural I-beam, metal frame, cable tray  
 Screw penetrates I-beam surface paint or oxide for electrical contact  
 Eliminates drilling structural steel  
 Aluminum body, tin-plated  
 Screw materials as noted

Dual Rated  
 CUAL  
 Continuous Loop




**GBC2A**  
 Plated steel screws

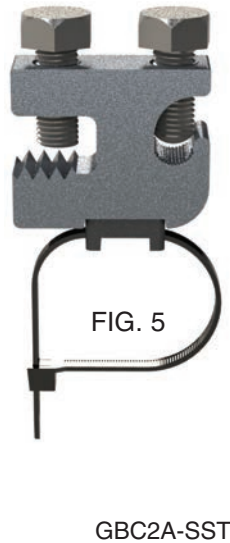

**GBC2A-SST**  
 Stainless steel screws  
 Cable tie slot (.06X.19) of  
 black UV resistant nylon.  
 Cable ties sold separately



**GBC250A-SS**  
 Stainless steel screws

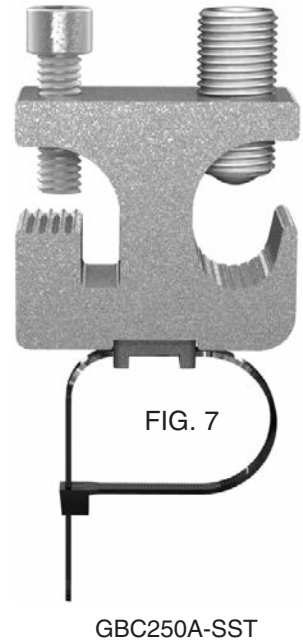

**GBC250A-SST**  
 Stainless steel screws  
 Cable tie slot (.06X.19) of  
 black UV resistant nylon.  
 Cable ties sold separately

### GBCA SERIES

NAED NUMBER	CATALOG NUMBER	FLANGE THICKNESS	WIRE RANGE	DIMENSIONS (IN)			FIG.	CTN QTY	EST. SHIPPING	
				W	L	H			WEIGHT (lbs)	UNIT
27170	<b>GBC2A</b>	.06 - 3/8	#14AWG - #2 STR	1.5	.62	1.21	4	10	1.1	CTN
27172	<b>GBC2A-SST</b>	.06 - 3/8	#14AWG - #2 STR	1.5	.62	1.4	5	10	1.2	CTN
27174	<b>GBC250A-SS</b>	.08 - .575	#6AWG - 250MCM	2	.87	1.8	6	10	2.8	CTN
27176	<b>GBC250A-SST</b>	.08 - .575	#6AWG - 250MCM	2	.87	2.0	7	10	2.9	CTN