



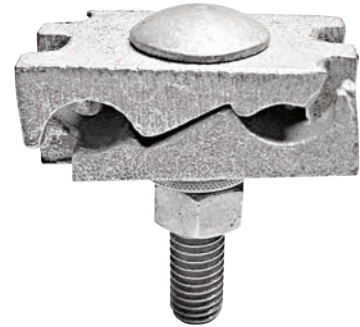

GROUNDING CABLE TRAY CONNECTORS

CABLE TRAY CLAMP

Bronze multi-purpose connector for tray, splice, tap, or cable-end
 High-copper alloy body castings
 Accommodates either one or two conductors
 Galvanized carriage bolt with square shoulder prevents turning
 Low profile bolt head provides smooth surface on inside of tray
 Large contact surfaces to tray and wires for low resistance
 For use with copper conductor

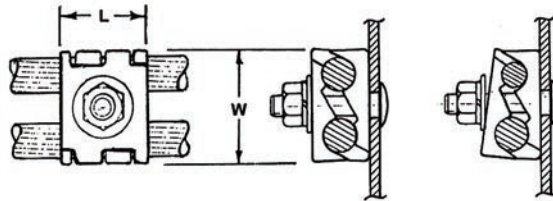

*CTGG 25-P
Shown

CTGG SERIES


NAED NUMBER	CATALOG NUMBER	WIRE RANGE		DIMENSIONS (IN)			BOLT SIZE	CTN QTY	EST. SHIPPING	
		MAIN	TAP	W	L	WEIGHT (lbs)			UNIT	
71180	CTGG 25	250-1/0	250-1/0	1 7/8	1	3/8-16 X 2	20	6.91	CTN	
71181	CTGG 25-P*	250-1/0	250-1/0	1 7/8	1	3/8-16 X 2	20	6.91	CTN	

*CTGG25-P is tin-plated for use with aluminum conductor or on aluminum tray, use oxide-inhibitor.
 Available with silicon bronze hardware, add "-BC" to CATALOG NUMBER.

Thru-Grip™ WIRE-TYPE CABLE TRAY CLAMP

For copper wire

For grounding applications on wire-basket type cable tray
 Use to connect single jumper-wire to tray sections
 Bronze high-copper alloy body
 Unique design provides lay-in feature quick installation turn prevention
 Mount on tray-wire perpendicular to ground wire direction
 Direct wire-to-wire contact provides low-resistance connection
 Provides smooth surface on inside of tray



CT29 SERIES

NAED NUMBER	CATALOG NUMBER	TRAY WIRE	GROUND CONDUCTOR	DIMENSIONS (IN)			SCREW SIZE	CTN QTY	EST. SHIPPING	
				H	L	W			WEIGHT (lbs)	UNIT
71190	CT 29	1/8 - 3/16	#10 - 6SOL	1	1/2	5/8	1/4-20 X 3/4	25	1.70	CTN
71191	CT 29-P*	1/8 - 3/16	#10 - 6SOL	1	1/2	5/8	1/4-20 X 3/4	25	1.70	CTN

Standard screw is round-head, recessed-socket, plated-steel
 Available with plated steel, slotted-head screw; add "-SL" to CATALOG NUMBER
 Available with silicon bronze hex-head screw; add "-BH" to CATALOG NUMBER
 *CT29-P is tin-plated