



SPLIT BOLTS

High strength solderless service connector
 High strength copper alloy
 Suitable for direct burial in earth and concrete

For copper and copperweld wires

A SERIES

NAED NUMBER	CATALOG NUMBER	MAX. WIRE EQUAL RUN EQUAL TAP	MIN. TAP WITH MAX. RUN	RECOMMENDED TORQUE INCH-LBS	CTN QTY	EST. SHIPPING	
						WEIGHT (lbs)	UNIT
10100	A 1	10 STR	14 STR	80	100	1.80	CTN
10130	A 2	8 STR	14 STR	80	100	2.80	CTN
10180	A 3	6 SOL	12 STR	165	100	5.00	CTN
10240	A 5	4 SOL	12 STR	165	100	6.50	CTN
10300	A 7	2 SOL	12 STR	275	100	9.72	CTN
10350	A 8	2 STR	12 STR	275	100	10.80	CTN
10400	A 10	1/0 STR	12 STR	385	50	8.10	CTN
10430	A 11	2/0 STR	12 STR	385	25	6.00	CTN
10460	A 12	3/0 STR	8 STR	450	25	10.70	CTN
10490	A 14	4/0-250 MCM	8 STR	600	25	12.90	CTN
10520	A 15	350 MCM	1/0 STR	600	12	9.20	CTN
10550	A 16	500 MCM	2/0 STR	750	12	11.40	CTN
10580	A 17	750 MCM	4/0 STR	900	3	5.10	CTN
10610	A 18	1000 MCM	4/0 STR	1000	3	7.50	CTN

* Sizes A 1 – A 11 are CSA certified.

TYPE FOR THREE MAXIMUM SIZE WIRES

10140	A 2 L	8 STR	14 STR	80	100	3.50	CTN
10220	A 4	6 SOL	14 STR	165	100	5.50	CTN
10280	A 6	4 SOL	12 STR	165	100	7.80	CTN
10310	A 7 L	3 STR	12 STR	275	100	10.20	CTN
10380	A 9	2 STR	10 STR	275	100	13.00	CTN

UNIVERSAL SPLIT BOLTS

All purpose type
 High-strength copper alloy
 Electro tin plated
 Spacer bar separates wires


A-SP SERIES

NAED NUMBERS	CATALOG NUMBER	MAXIMUM CONDUCTOR CU - AL	*ACSR	RECOMMENDED TORQUE INCH-LBS	CTN QTY	EST. SHIPPING	
						WEIGHT (lbs)	UNIT
10210	A 3SP	6 SOL	—	165	100	5.30	CTN
10270	A 5SP	4 SOL	6	165	100	7.40	CTN
10340	A 7SP	3 STR	4	275	100	11.20	CTN
10370	A 8SP	2 STR	2	275	100	11.70	CTN
10420	A 10SP	1/0 STR	1	385	50	9.20	CTN
10450	A 11SP	2/0 STR	1/0	385	25	7.00	CTN
10480	A 12SP	3/0 STR	2/0	450	25	11.80	CTN
10510	A 14SP	250 MCM	4/0	600	25	14.60	CTN
10540	A 15SP	350 MCM	266.8	600	12	10.20	CTN
10570	A 16SP	500 MCM	397.5	750	12	12.40	CTN
10600	A 17SP	750 MCM	666.6	900	3	5.60	CTN
10630	A 18SP	1000 MCM	900.00	1000	3	8.20	CTN

*Aluminum Cable Steel Reinforced
 UL listed for copper to copper applications only.



Dual-Rated

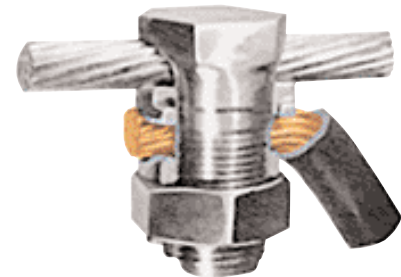

For Copper to copper
 Aluminum to copper
 Aluminum to aluminum
 Steel to copper
 Steel to aluminum

TAP CONNECTORS

TWO-BOLT TAPS

Bronze body and hardware


Suitable materials for direct burial in earth and concrete

A100 SERIES

NAED NUMBER	CATALOG NUMBER	WIRE RANGE				CTN QTY	EST. SHIPPING	
		MAIN		TAP			WEIGHT (lbs)	UNIT
		MAX.	MIN.	MAX.	MIN.			
12100	A 104	1/0 STR	#2	1/0 STR	#10	12	2.7	CTN
12120	A 105	2/0 STR	#2	2/0 STR	#10	12	4.0	CTN
12140	A 106	4/0 STR	2/0	4/0 STR	#6	12	4.0	CTN
12160	A 107	350 MCM	4/0	350 MCM	#4	6	5.9	CTN
12180	A 108	500 MCM	400 MCM	500 MCM	2/0	6	5.0	CTN
12200	A 109	800 MCM	400 MCM	800 MCM	3/0	3	5.2	CTN
12220	A 110	1000 MCM	500 MCM	1000 MCM	3/0	2	4.7	CTN

If spacer bars are required, add suffix "WS" to the CATALOG NUMBER.

For copper cable




A500 SERIES

Plated with Spacer

NAED NUMBER	CATALOG NUMBER	WIRE RANGE				CTN QTY	EST. SHIPPING	
		MAIN		TAP			WEIGHT (lbs)	UNIT
		MAX.	MIN.	MAX.	MIN.			
12240	A 504	1/0 STR	#2	1/0 STR	#10	12	5.3	CTN
12260	A 505	2/0 STR	#2	2/0 STR	#10	12	4.2	CTN
12280	A 506	4/0 STR	2/0	4/0 STR	#6	12	4.9	CTN
12300	A 507	350 MCM	4/0	350 MCM	#4	6	6.9	CTN
12320	A 508	500 MCM	400 MCM	500 MCM	2/0	6	6.0	CTN
12340	A 509	800 MCM	400 MCM	800 MCM	3/0	3	5.4	CTN
12360	A 510	1000 MCM	500 MCM	1000 MCM	3/0	2	5.6	CTN

Dual-Rated



For copper to aluminum