





GROUNDING CABLE TRAY CONNECTORS

CABLE TRAY CLAMP

Bronze multi-purpose connector for tray, splice, tap, or cable-end
High-copper alloy body
Accommodates either one or two conductors
Galvanized carriage bolt with square shoulder prevents turning
Low profile head provides smooth surface on inside of tray
Large contact surfaces to tray and wires for low resistance
For use with copper conductor

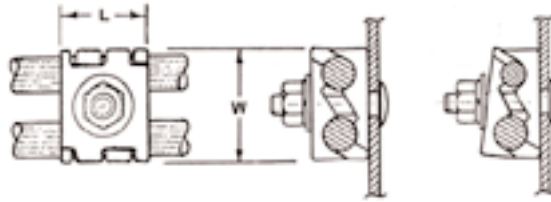

CTGG 25-P
Shown


CTGG SERIES

NAED NUMBER	CATALOG NUMBER	WIRE RANGE		DIMENSIONS (IN)		BOLT SIZE	CTN QTY	EST. SHIPPING	
		MAIN	TAP	W	L			WEIGHT (lbs)	UNIT
71180	CTGG 25	250-1/0	250-1/0	1 7/8	1	3/8-16 X 2	20	6.91	CTN
71181	CTGG 25-P*	250-1/0	250-1/0	1 7/8	1	3/8-16 X 2	20	6.91	CTN


*CTGG25-P is tin-plated for use with aluminum conductor or on aluminum tray, use oxide-inhibitor.
Available with silicon bronze hardware, add "-BC" to CATALOG NUMBER.

Thru-Grip™ WIRE-TYPE CABLE TRAY CLAMP

For grounding applications on wire-basket type cable tray
Use to connect single jumper-wire to tray sections
Bronze high-copper alloy body
Unique design provides lay-in feature quick installation turn prevention
Mount on tray-wire perpendicular to ground wire direction
Direct wire-to-wire contact provides low-resistance connection
Provides smooth surface on inside of tray



For copper wire

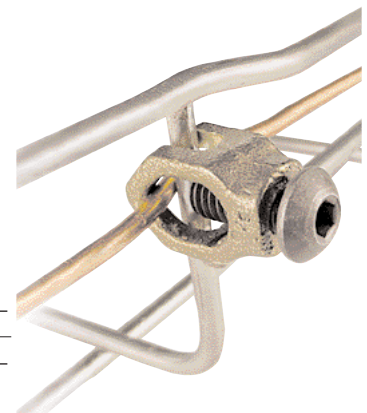

CT29 SERIES

NAED NUMBER	CATALOG NUMBER	TRAY WIRE	GROUND CONDUCTOR	DIMENSIONS (IN)			SCREW SIZE	CTN QTY	EST. SHIPPING	
				H	L	W			WEIGHT (lbs)	UNIT
71190	CT 29	1/8 - 3/16	#10 - 6SOL	1	1/2	5/8	1/4-20 X 3/4	25	1.70	CTN
71191	CT 29-P*	1/8 - 3/16	#10 - 6SOL	1	1/2	5/8	1/4-20 X 3/4	25	1.70	CTN

Standard screw is round-head, recessed-socket, plated-steel
Available with plated steel, slotted-head screw; add "-SL" to CATALOG NUMBER
Available with silicon bronze hex-head screw; add "-BH" to CATALOG NUMBER
*CT29-P is tin-plated