

## GROUNDING

### BAR OR TOWER GROUND CONNECTORS

Heavy Duty - Bronze castings for strength and ruggedness

Use for grounding cable or wire to a flat bar, plate, or structural steel member

High copper alloy bronze castings with silicon bronze hardware

Suitable for direct burial in earth or concrete

#### Direct Burial


For copper wire only



### TG SERIES

NAED NUMBER	CATALOG NUMBER	CABLE RANGE		BOLT SIZE	EST. SHIPPING	
		MAX	MIN		WEIGHT (lbs)	UNIT
71100	<b>TG 04</b>	#4 STR	#8 SOL	3/8	0.16	EA
71105	<b>TG 20</b>	2/0 STR	#4 SOL	3/8	0.41	EA
71110	<b>TG 25</b>	250 MCM	2/0 SOL	7/16	0.45	EA
71115	<b>TG 50</b>	500 MCM	300 MCM	1/2	0.87	EA
71116	<b>TG 75</b>	750 MCM	550 MCM	5/8	1.25	EA
71120	<b>TGM 04</b>	#4 STR	#8 SOL	3/8	0.13	EA
71125	<b>TGM 20</b>	2/0 STR	#4 SOL	3/8	0.20	EA
71130	<b>TGM 25</b>	250 MCM	2/0 SOL	7/16	0.31	EA
71135	<b>TGM 50</b>	500 MCM	300 MCM	1/2	0.80	EA
71140	<b>TGM 75</b>	750 MCM	550 MCM	5/8	1.10	EA

Consult factory for connectors for bar greater than 1/4" thick.  
For tin plating add suffix "P" to CATALOG NUMBERS.

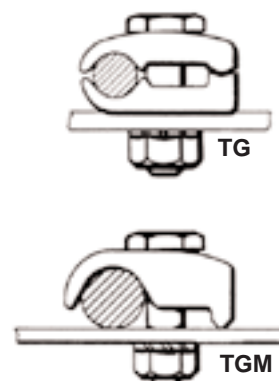


Connects one ground wire to  
1/4" thick bar or stanchion

### TGG SERIES

NAED NUMBER	CATALOG NUMBER	CABLE RANGE		BOLT SIZE	EST. SHIPPING	
		MAX	MIN		WEIGHT (lbs)	UNIT
71101	<b>TGG 04</b>	#4 STR	#8 SOL	3/8	0.23	EA
71106	<b>TGG 20</b>	2/0 STR	#4 SOL	3/8	0.38	EA
71111	<b>TGG 25</b>	250 MCM	2/0 SOL	7/16	0.81	EA
71117	<b>TGG 50</b>	500 MCM	300 MCM	1/2	1.50	EA
71118	<b>TGG 75</b>	750 MCM	550 MCM	5/8	2.20	EA
71121	<b>TGGM 04</b>	#4 STR	#8 SOL	3/8	0.20	EA
71126	<b>TGGM 20</b>	2/0 STR	#4 SOL	3/8	0.28	EA
71131	<b>TGGM 25</b>	250 MCM	2/0 SOL	7/16	0.70	EA
71136	<b>TGGM 50</b>	500 MCM	300 MCM	1/2	1.20	EA
71141	<b>TGGM 75</b>	750 MCM	550 MCM	5/8	2.00	EA

Consult factory for connectors for bar greater than 1/4" thick.  
For tin plating add suffix "P" to CATALOG NUMBERS.

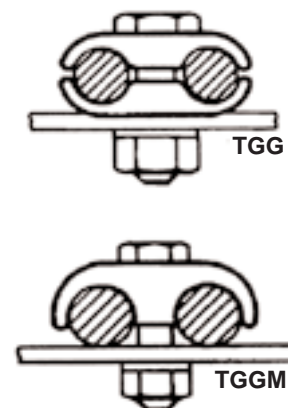

Connects two ground wires  
to 1/4" thick bar or stanchion