



GROUNDING

BAR OR TOWER GROUND CONNECTORS

heavy duty – Bronze castings for strength and ruggedness

Use for grounding cable or wire to a flat bar, plate, or structural steel member

high copper alloy bronze castings with silicon bronze or stainless steel hardware

Suitable for direct burial in earth or concrete

Direct Burial

For copper wire only
Continuous Loop


TG SERIES

NAED NUMBER	CATALOG NUMBER	CABLE RANGE		BOLT SIZE	EST. SHIPPING	
		MAX	MIN		WEIGHT (lbs)	UNIT
71100	TG 04	#4 St r	#8 SOL	3/8	0.16	EA
71105	TG 20	2/0 St r	#4 SOL	3/8	0.29	EA
71110	TG 25	250 MCM	2/0 SOL	1/2	0.45	EA
71115	TG 50	500 MCM	300 MCM	1/2	0.95	EA
71116	TG 75	750 MCM	550 MCM	5/8	1.25	EA
71120	TGM 04	#4 St r	#8 SOL	3/8	0.13	EA
71125	TGM 20	2/0 St r	#4 SOL	3/8	0.20	EA
71130	TGM 25	250 MCM	2/0 SOL	1/2	0.31	EA
71135	TGM 50	500 MCM	300 MCM	1/2	0.80	EA
71140	TGM 75	750 MCM	550 MCM	5/8	1.22	EA

Consult factory for connectors for bar greater than 1/4" thick.

For tin plating add suffix "P" to Catalog Numbers.

For tork-Away Security hardware, add suffix "t A" to Catalog Number and contact factory for availability.

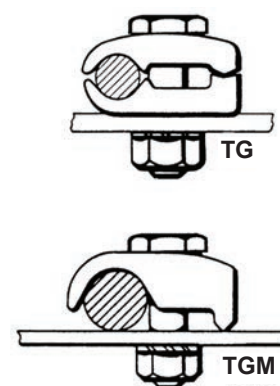

Connects one ground wire to
1/4" thick bar or stanchion


TGG SERIES

NAED NUMBER	CATALOG NUMBER	CABLE RANGE		BOLT SIZE	EST. SHIPPING	
		MAX	MIN		WEIGHT (lbs)	UNIT
71101	TGG 04	#4 St r	#8 SOL	3/8	0.23	EA
71106	TGG 20	2/0 St r	#4 SOL	3/8	0.38	EA
71111	TGG 25	250 MCM	2/0 SOL	1/2	0.81	EA
71117	TGG 50	500 MCM	300 MCM	1/2	1.50	EA
71118	TGG 75	750 MCM	550 MCM	5/8	2.20	EA
71121	TGGM 04	#4 St r	#8 SOL	3/8	0.20	EA
71126	TGGM 20	2/0 St r	#4 SOL	3/8	0.28	EA
71131	TGGM 25	250 MCM	2/0 SOL	1/2	0.70	EA
71136	TGGM 50	500 MCM	300 MCM	1/2	1.20	EA
71141	TGGM 75	750 MCM	550 MCM	5/8	2.00	EA

Consult factory for connectors for bar greater than 1/4" thick.

For tin plating add suffix "P" to Catalog Numbers.

For tork-Away Security hardware, add suffix "t A" to Catalog Number, contact factory for availability.

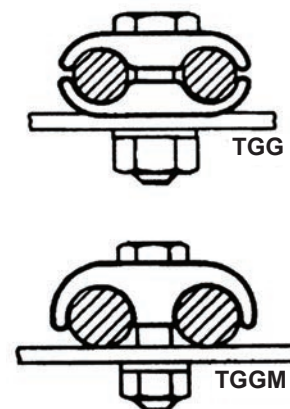

Connects two ground wires
to 1/4" thick bar or stanchion