



COMPRESSION

TELECOMMUNICATIONS LUGS

Long barrel copper compression terminals for telecommunications applications
 Produced from high conductivity seamless copper tubing
 Tin plated to provide corrosion resistance
 Marked with die index and color coded
 Sight-hole for inspection on sizes #8 - 4/0 AWG

For copper cable
 600V**


L-TC SERIES

Two-Hole

NAED NUMBER	CATALOG NUMBER	WIRE SIZE	BOLT HOLES		U-TYPE DIE		CTN QTY	EST. SHIPPING	
			SIZE	SPACING	COLOR	INDEX		WEIGHT (lbs)	UNIT
33080	L8-TC10-1	#8	#10	5/8	RED	6	50	1.00	CTN
33081	L8-TC14-1		1/4	5/8				1.17	CTN
33061	L6-TC14-1	#6	1/4	5/8	BLUE	7/374	50	1.39	CTN
33062	L6-TC14-2		1/4	3/4				1.45	CTN
33064	L6-TC14-5	#6	1/4	1	BLUE	7/374	50	1.50	CTN
33066	L6-TC38-2		3/8	3/4				0.76	CTN
33067	L6-TC38-5	#6	3/8	1	BLUE	7/374	25	0.90	CTN
33068	*L6-TC38-25		3/8	3/4-1				1.00	CTN
33041	L4-TC14-1	#4	1/4	5/8	GRAY	8/346	25	0.94	CTN
33042	L4-TC14-2		1/4	3/4				1.01	CTN
33046	L4-TC38-2	#4	3/8	3/4	GRAY	8/346	25	1.00	CTN
33047	L4-TC38-5		3/8	1				0.94	CTN
33031	L3-TC14-1	#3 & 2 SOL	1/4	5/8	WHITE	9	25	0.94	CTN
33037	L3-TC38-5		3/8	1				1.28	CTN
33039	*L3-TC38-25	#3 & 2 SOL	3/8	3/4-1	WHITE	9	25	1.30	CTN
33021	L2-TC14-1		1/4	5/8				1.35	CTN
33022	L2-TC14-2	#2	1/4	3/4	BROWN	10	25	1.48	CTN
33025	L2-TC56-2		5/16	3/4				1.43	CTN
33026	L2-TC38-2	#2	3/8	3/4	BROWN	10	25	1.46	CTN
33027	L2-TC38-5		3/8	1				1.58	CTN
33028	L2-TC38-8	#2	3/8	1 1/4	BROWN	10	25	1.56	CTN
33011	L1-TC14-1		1/4	5/8				1.55	CTN
33012	L1-TC14-2	#1	1/4	3/4	GREEN	11/375	25	1.56	CTN
33015	L1-TC56-4		5/16	7/8				1.58	CTN
33016	L1-TC38-2	#1	3/8	3/4	GREEN	11/375	25	1.60	CTN
33017	L1-TC38-5		3/8	1				1.65	CTN
33101	L10-TC14-1	1/0	1/4	5/8	PINK	12/348	25	2.12	CTN
33102	L10-TC14-2		1/4	3/4				2.16	CTN
33105	L10-TC56-4	1/0	5/16	7/8	PINK	12/348	25	2.26	CTN
33107	L10-TC38-5		3/8	1				2.34	CTN
33201	L20-TC14-1	2/0	1/4	5/8	BLACK	13	25	2.45	CTN
33202	L20-TC14-2		1/4	3/4				2.58	CTN
33207	L20-TC38-5	2/0	3/8	1	BLACK	13	25	2.77	CTN
33301	L30-TC14-1		1/4	5/8				3.22	CTN
33302	L30-TC14-2	3/0	1/4	3/4	ORANGE	14	25	3.24	CTN
33307	L30-TC38-5		3/8	1				3.26	CTN
33402	L40-TC14-2	4/0	1/4	3/4	PURPLE	15	25	4.30	CTN
33407	L40-TC38-5		3/8	1				4.30	CTN
33257	L250-TC38-5	250	3/8	1	YELLOW	16	12	2.50	CTN
33337	L300-TC38-5	300	3/8	1	WHITE	17/298		2.66	CTN
33352	L350-TC14-2	350	1/4	3/4	RED	18/324	6	2.70	CTN
33357	L350-TC38-5		3/8	1				RED	18/324
33502	L500-TC14-2	500	1/4	3/4	BROWN	20/299	6	2.72	CTN
33507	L500-TC38-5		3/8	1				BROWN	20/299
33607	L600-TC38-5	600	3/8	1	GREEN	22/472	6	3.35	CTN
33757	L750-TC38-5	750	3/8	1	BLACK	24/473		3.37	CTN
33917	L1000-TC38-5	1000	3/8	1	WHITE	27	6	3.40	CTN



* Slotted

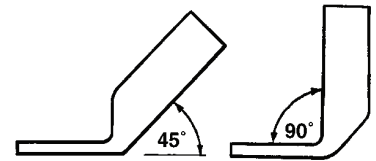

For angle lugs consult factory for availability.

Catalog Number Keys

Key	Bolt Size
TC14	1/4
TC56	5/16
TC38	3/8
TC48	1/2

Key	Hole Spacing
-0	1/2
-1	5/8
-2	3/4
-3	13/16
-4	7/8
-5	1
-6	1 1/4
-7	1 1/2
-8	1 3/4
-25*	3/4-1 Slotted
-S	Special

"TC" indicates telecommunications spacing for tang mounting holes.
 Other sizes and types available; consult factory.
 For blank tangs consult factory for availability.
 **May be used for up to 35KV applications when proper installation and insulation procedures are employed.