



GREAVES

COMPRESSION



Shoo-in™ FLEx-CABLE CONNECTORS


For flexible cable applications in locomotive, mining, marine, welding machinery, temporary power, wind power, and transformers
 Features flared Shoo-in™ barrel opening for easy cable insertion
 All L-NFX lugs have 1.75" max tang width to accommodate side-by-side NEMA stud spacing
 Copper, tin-plated for corrosion resistance



For copper cable

**LONG BARREL LUGS
L-NFx SERIES**

Two-Hole NEMA

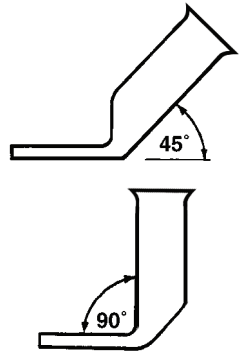

- For angle lugs consult factory for availability.

- For blank tangs consult factory for availability.

NAED NUMBER	CATALOG NUMBER	DIESEL-LOCOMOTIVE		CLASS H	CLASS M	BOLT SIZE	U-TYPE DIE		EST. SHIPPING	
		APPROX (AWG) MCM	CABLE STRAND	ROPE CABLE AWG/MCM	WELD CABLE AWG/MCM		COLOR	INDEX	WEIGHT (lbs)	UNIT
32372	L 90NFx	(1) 90.9	225/24	#1	#1	1/2	GREEN	11/375	0.11	EA
32373	L 111NFx	(1/0) 111.1	275/24	1/0	1/0	1/2	PINK	12/348	0.14	EA
32374	L 131NFx	(2/0) 131.3	325/24	2/0	-	1/2	BLACK	13	0.16	EA
32375	L 181NFx	(3/0) 181.8	450/24	3/0	2/0	1/2	ORANGE	14	0.21	EA
32376	L 222NFx	(4/0) 222.2	550/24	4/0	3/0	1/2	PURPLE	15	0.27	EA
32377	L 262NFx	262.6	650/24	250	4/0	1/2	WHITE	17/298	0.28	EA
32378	L 313NFx	313.1	775/24	300	250	1/2	RED	18/324	0.38	EA
32379	L 373NFx	373.7	925/24	350	300	1/2	BLUE	19/470	0.65	EA
32380	L 444NFx	444.4	1100/24	400	350	1/2	BROWN	20/299	0.87	EA
32381	L 535NFx	535.3	1325/24	500	400	1/2	PINK	300	0.89	EA
32383	L 646NFx	646.4	1600/24	700	600	1/2	BLACK	24/473	1.06	EA
32384	† L 777NFx	777.7	1925/24	800	700	1/2	YELLOW	936	1.47	EA
32385	† L 929NFx	929.2	2299/24	1000	900	1/2	-	P44RT	1.65	EA
32386	† L 1111NFx	1111.1	2745/24	1250	1000	1/2	-	P45RT	1.90	EA

May be used for applications up to 35 KV when proper installation and insulation procedures are employed.
 Due to the variety of styles of high-strand, flexible cable, and due to the variations among cable manufacturers, it is recommended to fit the conductor to the actual cable being utilized. See SIZING GUIDE.
 Suffix "N" indicates NEMA tang drilling, 1 3/4" on centers for 1/2" bolts.
 All L-NFX lugs shown have 1.75" maximum width to allow side-by-side NEMA mounting.
 Sizes through 373FX are UL.
 †Size not CSA.