



GREAVES

COMPRESSION

ALUMINUM LUGS

Designed for heavy duty dual-rated applications
 Made of high conductivity wrought aluminum
 Tin plated to provide corrosion resistance
 Connector bores are coated with oxide inhibitor and capped
 Marked with die index and die color



Dual-Rated
 AL9CU
 600 V*

AL-N SERIES

Two-Hole NEMA

| NAED NUMBER | CATALOG NUMBER | WIRE SIZE | BOLT SIZE | U-TYPE DIE | | CTN QTY | EST. SHIPPING | |
|-------------|----------------|-----------|-----------|------------|--------|---------|---------------|------|
| | | | | COLOR | INDEX | | WEIGHT (lbs) | UNIT |
| 50454 | AL 10 N | 1/0 | 1/2 | TAN | 296 | 12 | 1.18 | CTN |
| 50456 | AL 20 N | 2/0 | 1/2 | OLIVE | 297 | 12 | 1.30 | CTN |
| 50458 | AL 30 N | 3/0 | 1/2 | RUBY | 467 | 12 | 1.30 | CTN |
| 50460 | AL 40 N | 4/0 | 1/2 | WHITE | 17/298 | 12 | 2.26 | CTN |
| 50462 | AL 250 N | 250 | 1/2 | RED | 18/324 | 12 | 2.38 | CTN |
| 50464 | AL 300 N | 300 | 1/2 | BLUE | 470 | 6 | 1.48 | CTN |
| 50466 | AL 350 N | 350 | 1/2 | BROWN | 20/299 | 6 | 2.08 | CTN |
| 50468 | AL 400 N | 400 | 1/2 | GREEN | 22/472 | 6 | 2.56 | CTN |
| 50470 | AL 500 N | 500 | 1/2 | PINK | 300 | 6 | 3.22 | CTN |
| 50472 | # AL 600 N | 600 | 1/2 | BLACK | 24/473 | 3 | 2.24 | CTN |
| 50474 | # AL 750 N | 750 | 1/2 | YELLOW | 936 | 3 | 2.30 | CTN |
| 50478 | # AL 1000 N | 1000 | 1/2 | BROWN | 302 | 1 | 1.82 | EA |

*May be used for applications up to 35KV when proper installation and insulation procedures are employed.
 # AL-N lugs have 1.75" maximum width to allow side-by-side NEMA mounting.



STACKING ALUMINUM LUGS

Made of high conductivity wrought aluminum
 Designed to fit specifically with AL-N series to form pair
 Tin plated to provide corrosion resistance
 Connector bores are coated with oxide inhibitor and capped
 Marked with die index and die color



Dual-Rated
 AL9CU
 600 V*


ASL-N SERIES

Two-Hole NEMA

| NAED NUMBER | CATALOG NUMBER | WIRE SIZE | BOLT SIZE | U-TYPE DIE | | EST. SHIPPING | |
|-------------|----------------|-----------|-----------|------------|--------|---------------|------|
| | | | | COLOR | INDEX | WEIGHT (lbs) | UNIT |
| 60725 | ASL 10 N | 1/0 | 1/2 | TAN | 296 | 0.14 | EA |
| 60730 | ASL 20 N | 2/0 | 1/2 | OLIVE | 297 | 0.15 | EA |
| 60735 | ASL 30 N | 3/0 | 1/2 | RUBY | 467 | 0.15 | EA |
| 60740 | ASL 40 N | 4/0 | 1/2 | WHITE | 17/298 | 0.23 | EA |
| 60745 | ASL 250 N | 250 | 1/2 | RED | 18/324 | 0.25 | EA |
| 60750 | ASL 300 N | 300 | 1/2 | BLUE | 19/470 | 0.30 | EA |
| 60755 | ASL 350 N | 350 | 1/2 | BROWN | 20/299 | 0.36 | EA |
| 60760 | ASL 400 N | 400 | 1/2 | GREEN | 22/472 | 0.45 | EA |
| 60765 | ASL 500 N | 500 | 1/2 | PINK | 300 | 0.63 | EA |
| 60770 | ASL 600 N | 600 | 1/2 | BLACK | 24/473 | 0.71 | EA |
| 60775 | # ASL 750 N | 750 | 1/2 | YELLOW | 936 | 0.72 | EA |

Suffix "N" indicates NEMA tang drilling, 1 $\frac{1}{4}$ " on centers for 1/2" bolts.

*May be used for applications up to 35KV when proper installation and insulation procedures are employed.
 # All ASL-N lugs have 1.75" maximum width to allow side-by-side NEMA mounting.

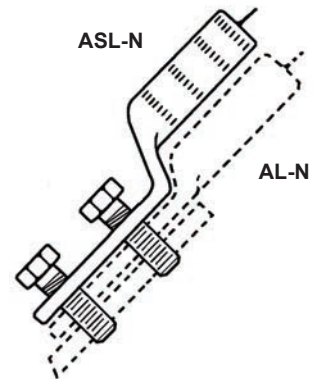

CAUTION

ASL-N might not fit competitor lugs.
 Greaves AL-N Series lugs are recommended to make a pair.
 Straight lugs sold separately.