



SERVICE ENTRANCE

PARALLEL ALUMINUM CLAMPS

Splice or tap for service entrance connection
Cast aluminum body with galvanized or stainless steel hardware

PAC SERIES

NAED NUMBER	CATALOG NUMBER	CONDUCTOR RANGE		FIG.	CTN QTY	EST. SHIPPING	
		MAIN	TAP			WEIGHT (lbs)	UNIT
15101	PAC 4010	4/0 - 1/0	1/0 - 8	1	25	6.51	CTN
15102	PAC 4040	4/0 - 2	4/0 - 2	2	20	9.06	CTN

Pre-filled with oxide-inhibitor and individually bagged.

15111	PAC 4010-X	4/0 - 1/0	1/0 - 8	1	20	7.26	CTN
15112	PAC 4040-X	4/0 - 2	4/0 - 2	2	10	5.76	CTN

Bronze clamps available, consult factory.

Dual-Rated

Bug•Lug™ oxide-inhibitor is recommended for all aluminum terminations



Figure 1




Figure 2

PARALLEL ALUMINUM CLAMPS

Splice or tap for service entrance connection
Extruded aluminum body
High-stress anodized aluminum bolt with integral washer
Pre-filled with oxide-inhibitor and individually bagged

PAC-X SERIES

NAED NUMBER	CATALOG NUMBER	CONDUCTOR RANGE		BOLT SIZE	DIMENSIONS		CTN QTY	EST. SHIPPING	
		GROOVE A	GROOVE B		L	W		WEIGHT (lbs)	UNIT
15211	PAC20-X	2/0STR-6SOL 2/0-#6ACSR	2/0STR-6SOL 2/0-#6ACSR	3/8	1.37	1.61	20	2.6	CTN
15212	PAC40-X	4/0STR-2SOL 4/0-#4ACSR	4/0STR-2SOL 4/0-#4ACSR	3/8	1.50	1.97	10	2.2	CTN

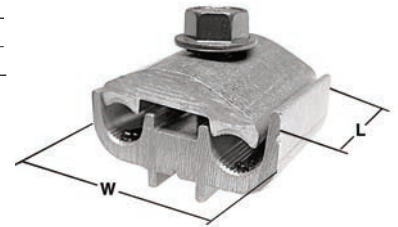

Dual-Rated

RUS Approved