



Dual-Rated

CU9AL

NON-INSULATED BLOCKS

Aluminum alloy 6061-T6
Prefilled with oxide inhibitor

PD SERIES



Wire entry
optional from
either side

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	WIRE CIRCUITS	DIMENSIONS			ALLEN HEX	CTN QTY	EST. SHIPPING	
				LENGTH	WIDTH	HEIGHT			WEIGHT (lbs)	UNIT
13500	PD 250-4		4	3.50				6	2.15	CTN
13505	PD 250-6	250 MCM-#6	6	6.25	.87	1.13	5/16	6	3.15	CTN
13510	PD 250-8		8	7.00				6	4.15	CTN
13515	PD 350-4		4	4.25				3	1.75	CTN
13520	PD 350-6	350 MCM-#6	6	6.38	1.00	1.44	5/16	3	2.65	CTN
13525	PD 350-8		8	8.50				3	3.35	CTN
13542	PD 600-4		4	5.40				3	2.25	CTN
13543	PD 600-6	600 MCM-#4	6	8.25	1.25	1.62	5/16	3	3.75	CTN
13544	PD 600-8		8	11.00				3	4.45	CTN
13545	PD 750-4		4	6.00				2	2.60	CTN
13550	PD 750-6	750-250 MCM	6	8.96	1.44	2.00	3/8	2	3.92	CTN
13555	PD 750-8		8	11.81				1	2.60	EA

Other sizes available. Also available with insulated mounting positions. Consult factory.


Not recommended for use with fine-stranded, flexible cables.

For flex/extra-flex high-strand wire, first install a PT-FX Shoo-Pin™ Adapter.

Shoo-pin™ Adapters for flex cable terminations

For reliable termination of high-strand flexible cables into set-screw type lugs, terminate the flex cable with a PT-FX Shoo-Pin Adapter.

- For dual-rated or CU set-screw lugs
- Also for PBS/USA/USAD insulated connectors

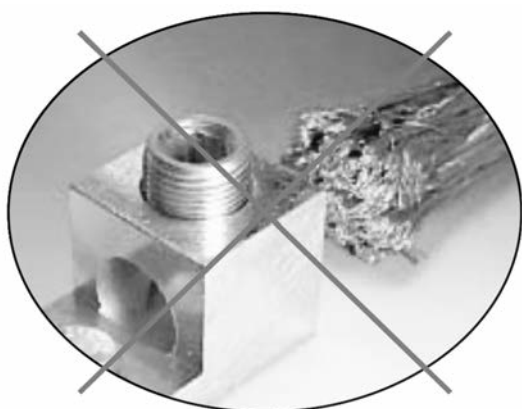

GREAVES EXCLUSIVE

