




For copper strap

## GROUNDING FLEXIBLE STRAP SYSTEM



### PIPE CLAMPS FOR FLEXIBLE STRAPS

For grounding flat flexible strap to fence posts, gates or water pipe  
Bronze high-copper alloy castings

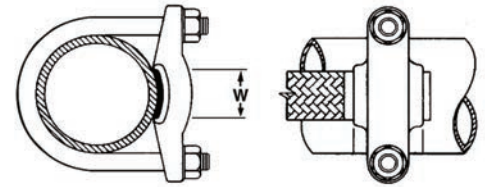

### CF SERIES

NAED NUMBER	CATALOG NUMBER	PIPE SIZE IPS	STRAP MAX W (IN)	EST. SHIPPING	
				WEIGHT (lbs)	UNIT
25710	CF 101	1	1	0.57	EA
25712	CF 121	1 1/4	1	0.65	EA
25715	CF 151	1 1/2	1	0.72	EA
25720	CF 201	2	1	0.78	EA
25725	CF 251	2 1/2	1	0.95	EA
25730	CF 301	3	1	1.02	EA
25735	CF 351	3 1/2	1	1.16	EA
25740	CF 401	4	1	1.22	EA
25750	CF 501	5	1	1.79	EA
25760	CF 601	6	1	2.30	EA



### FLEXIBLE JUMPER STRAP CONNECTORS

Use to absorb expansion, misalignment, or motion of equipment

Use with CF Series clamps to bond fencepost to gate

Flexible flat woven tin-plated copper braid

Seamless high-conductivity tin-plated copper flat ferrules



### FJ SERIES

NAED NUMBER	CATALOG NUMBER	EQUIV. WIRE SIZE (APPROX)	NOMINAL AMP RATING*		NOMINAL DIMENSIONS			EST. SHIPPING	
			INDOOR	OUTDOOR	L	W	T	WEIGHT (lbs)	UNIT
26870	FJ 200-18N	#1 AWG	200	245	18	1	1/8	0.47	EA
26880	FJ 300-18N	3/0 AWG	340	405	18	1	3/16	0.86	EA
26890	FJ 400-18N	4/0 AWG	360	430	18	1	1/4	1.23	EA

\* Ampacity varies with service conditions such as environment, airflow, orientation, temperature rise, etc.

NEMA bolt pattern for (2) 1/2" bolts on 1 3/4" centers.

Other configurations and sizes available; consult factory.



### FENCE FABRIC GROUNDING CLAMPS

For grounding of fence fabric, barbed wire, and theft-deterrent wire

Accommodates two wires at nearly any angle

Electro-tin plated bronze body with stainless steel hardware



### GFGC SERIES

NAED NUMBER	CATALOG NUMBER	CONDUCTOR SIZE (AWG)	DIMENSIONS		TORQUE (IN-LBS)	CTN QTY	EST. SHIPPING	
			DIA	H			WEIGHT (lbs)	UNIT
25918	GFGC8	#8 AWG	1	5/8	67	10	2	CTN
25916	GFGC6	#6 AWG	1	11/16	67	10	2	CTN
25914	GFGC4	#4 AWG	1	7/8	67	10	2	CTN
25912	GFGC2	#2 AWG	1	13/16	67	10	2	CTN
25920	GFGC20	#2/0AWG	1-3/8	15/16	67	5	1.5	CTN
25924	GFGC240	#2 & 4/0 AWG	1-5/8	1	67	5	1.5	CTN

Also available with Tork-Away™ security hardware to assure required torque and provide tamper-resistance. Add suffix "TA" to Catalog Number and contact factory for availability.

Other sizes available, contact factory.

