
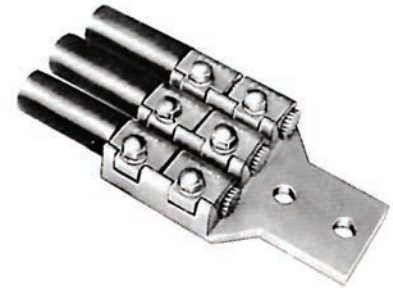


## 3JJA SERIES

### Terminal lugs, three cables, straight

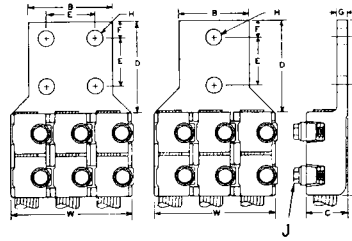


Cable Range			BRONZE CONNECTORS									DUAL-RATED ALUMINUM CONNECTORS								
Max.	Min.	H.T.	Catalog Number	Dimension in Inches (Approximate)								Catalog Number	Dimension in Inches (Approximate)							
				A	B	C	D	F	G	J	W		A	B	C	D	F	G	J	W
1/0	#4	2	<b>3JJ3A2N</b>	4 1/8	1 7/8	1 3/16	3 1/4	5/8	1/4	5/16	3 3/16	<b>AL3JJ2A2N</b>	6 7/8	1 7/8	1 5/16	3 1/4	5/8	3/32	5/16	3 1/16
2/0	1/0	2		4 1/8	1 7/8	1 3/16	3 1/4	5/8	1/4	5/16	3 3/16	<b>AL3JJ4A2N</b>	7	1 7/8	1 3/16	3 1/4	5/8	5/16	5/16	3 13/16
4/0	1/0	2		4 1/8	1 7/8	1 3/16	3 1/4	5/8	1/4	5/16	3 3/16	<b>AL3JJ4A4N</b>	7	3	1 3/16	3 1/4	5/8	5/16	5/16	3 13/16
4/0	2/0	2		<b>3JJ4A2N</b>	5 11/16	1 7/8	1	3 1/4	5/8	1/4	5/16	3 3/16	<b>AL3JJ5A2N</b>	7 1/2	2 1/4	1 3/8	3 3/8	5/8	1 3/32	3/8
4/0	2/0	2	<b>3JJ4A4N</b>	5 11/16	3	1	3 1/4	5/8	1/4	5/16	3 3/16	<b>AL3JJ5A4N</b>	7 1/2	3	1 3/8	3 3/8	5/8	1 3/32	3/8	4 3/8
350	4/0	2	<b>3JJ5A2N</b>	6 1/16	2 9/32	1 1/4	3 5/16	5/8	5/16	3/8	3 5/16	<b>AL3JJ6A2N</b>	7 7/8	2 1/2	1 5/8	3 1/2	5/8	1 5/32	3/8	4 15/16
350	4/0	4	<b>3JJ5A4N</b>	6 1/16	3	1 1/4	3 5/16	5/8	5/16	3/8	3 5/16	<b>AL3JJ6A4N</b>	7 7/8	3	1 5/8	3 1/2	5/8	1 5/32	3/8	4 15/16
500	350	2	<b>3JJ6A2N</b>	6 5/8	2 1/2	1 7/16	3 3/8	5/8	3/8	3/8	4 1/2	<b>AL3JJ7A2N</b>	8 1/4	3	1 15/16	3 1/2	3/4	5/8	7/16	5 11/16
500	350	4	<b>3JJ6A4N</b>	6 5/8	3	1 7/16	3 3/8	5/8	3/8	3/8	4 1/2	<b>AL3JJ7A4N</b>	8 1/4	3	1 15/16	3 1/2	3/4	5/8	7/16	5 11/16
750	500	2	<b>3JJ7A2N</b>	7 1/8	3	1 3/4	3 3/8	5/8	7/16	7/16	5 1/8	<b>AL3JJ8A2N</b>	8 7/8	3 1/4	2 3/16	3 1/2	7/8	2 1/32	1/2	6 7/16
750	500	4	<b>3JJ7A4N</b>	7 1/8	3	1 3/4	3 3/8	5/8	7/16	7/16	5 1/8	<b>AL3JJ8A4N</b>	8 7/8	3 1/4	2 3/16	3 1/2	7/8	2 1/32	1/2	6 7/16
1000	750	2	<b>3JJ8A2N</b>	7 13/16	3 3/32	1 15/16	3 3/8	5/8	1/2	1/2	6	<b>AL3JJ8A4N</b>	8 7/8	3 1/4	2 3/16	3 1/2	7/8	2 1/32	1/2	6 7/16
1000	750	4	<b>3JJ8A4N</b>	7 13/16	3 3/32	1 15/16	3 3/8	5/8	1/2	1/2	6	<b>AL3JJ8A4N</b>	8 7/8	3 1/4	2 3/16	3 1/2	7/8	2 1/32	1/2	6 7/16

\*\* Holes in Tang

## 4JJA SERIES


### Terminal lugs, four cables, straight

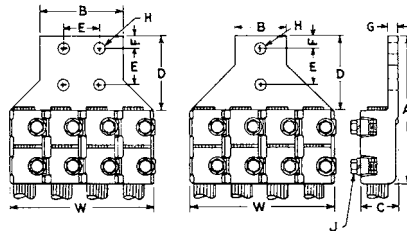

4/0	1/0	2	<b>4JJ4A2N</b>	5 11/16	2	1	3 1/4	5/8	1/4	5/16	4 7/16	<b>AL4JJ4A2N</b>	7	2	1 3/16	3 3/8	5/8	5/16	5/16	5 1/16	
4/0	1/0	4		5 11/16	3	1	3 1/4	5/8	1/4	5/16	4 7/16	<b>AL4JJ4A4N</b>	7	3	1 3/16	3 3/8	5/8	5/16	5/16	5 1/16	
4/0	2/0	2		<b>4JJ5A2N</b>	6 1/16	2	1 1/4	3 3/8	5/8	5/16	3/8	5 1/16	<b>AL4JJ5A2N</b>	7 1/2	2	1 3/8	3 3/8	5/8	1 3/32	3/8	5 13/16
4/0	2/0	4		<b>4JJ5A4N</b>	6 1/16	3	1 1/4	3 3/8	5/8	5/16	3/8	5 1/16	<b>AL4JJ5A4N</b>	7 1/2	3	1 3/8	3 3/8	5/8	1 3/32	3/8	5 13/16
350	4/0	2	<b>4JJ6A2N</b>	6 5/8	2 1/2	1 7/16	3 1/2	5/8	3/8	3/8	6	<b>AL4JJ6A2N</b>	8	2 1/2	1 5/8	3 5/8	5/8	1 5/32	3/8	6 5/8	
350	4/0	4	<b>4JJ6A4N</b>	6 5/8	4	1 7/16	3 1/2	5/8	3/8	3/8	6	<b>AL4JJ6A4N</b>	8	4	1 5/8	3 5/8	5/8	1 5/32	3/8	6 5/8	
500	350	2	<b>4JJ7A2N</b>	7 1/8	4	1 3/4	3 3/4	5/8	7/16	7/16	6 3/16	<b>AL4JJ7A2N</b>	8 5/8	4	1 15/16	3 5/8	5/8	5/8	7/16	7 5/8	
500	350	4	<b>4JJ7A4N</b>	7 1/8	4	1 3/4	3 3/4	5/8	7/16	7/16	6 3/16	<b>AL4JJ7A4N</b>	8 5/8	4	1 15/16	3 5/8	5/8	5/8	7/16	7 5/8	
750	500	2	<b>4JJ8A2N</b>	7 13/16	4 1/2	1 15/16	4 1/8	7/8	1/2	1/2	8	<b>AL4JJ8A2N</b>	9 5/8	4 1/2	2 3/16	4 1/8	5/8	2 1/32	1/2	8 5/8	
750	500	4	<b>4JJ8A4N</b>	7 13/16	4 1/2	1 15/16	4 1/8	7/8	1/2	1/2	8	<b>AL4JJ8A4N</b>	9 5/8	4 1/2	2 3/16	4 1/8	5/8	2 1/32	1/2	8 5/8	

E = 1 3/4"


H = 9/16"



## 5JJA SERIES

### Terminal lugs, five cables, straight

Left and right hand tangs available on types 4JJA and 5JJA.  
Add prefix L for left, R for right (i.e. L5JJ4A4N)

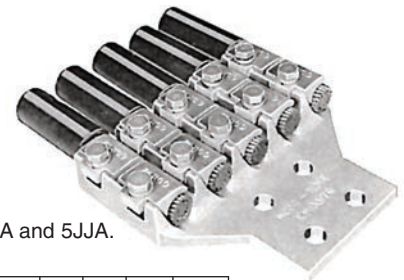

4/0	1/0	4	<b>5JJ4A4N</b>	5 11/16	3	1	3 1/4	5/8	1/4	5/16	5 11/16	<b>AL5JJ4A4N</b>	7	3	1 3/16	3 3/8	5/8	5/16	5/16	6 7/16	
4/0	2/0	4		5 11/16	3	1	3 1/4	5/8	1/4	5/16	5 11/16	<b>AL5JJ5A4N</b>	7 1/2	3	1 3/8	3 3/8	5/8	1 3/32	3/8	7 3/8	
350	4/0	4		<b>5JJ5A4N</b>	6 1/16	3	1 1/4	3 3/8	5/8	5/16	3/8	6 1/2	<b>AL5JJ5A4N</b>	8	4	1 5/8	3 5/8	5/8	1 5/32	3/8	8 5/16
500	350	4		<b>5JJ6A4N</b>	6 5/8	4	1 7/16	3 1/2	5/8	3/4	3/4	7 11/16	<b>AL5JJ6A4N</b>	8 5/8	4	1 15/16	3 5/8	5/8	5/8	7/16	8 5/16
750	500	4	<b>5JJ7A4N</b>	7 1/8	4	1 3/4	3 3/4	5/8	7/16	7/16	8 15/16	<b>AL5JJ7A4N</b>	8 5/8	4	1 15/16	3 5/8	5/8	5/8	7/16	8 5/16	
1000	750	4	<b>5JJ8A4N</b>	7 13/16	4 1/2	1 15/16	4 1/8	7/8	1/2	1/8	10 3/16	<b>AL5JJ8A4N</b>	9 5/8	4 1/2	2 3/16	4 1/8	7/8	2 1/32	1/2	10 3/16	

Also available with six or more cable capacity.