



COMPRESSION

REDUCING ADAPTERS

Versatile adapters fit into copper compression splice or lug to reduce barrel size

Install with compression die appropriate for barrel size

High conductivity copper, tin-plated

Some sizes are corrugated, some smooth with open seam

CRA SERIES

NAED NUMBER	CATALOG NUMBER	REDUCES SIZE		LENGTH	U-TYPE DIE			
		FROM	TO		COLOR	INDEX		
41661	CRA 6-10	#6	#10	1 1/2	BLUE	7/374		
41626	CRA 2-6	#2	#6		BROWN	10		
41616	CRA 10-6	1/0	#6	1 5/16	PINK	12/348		
41614	CRA 10-4		#4					
41627	CRA 20-1	2/0	#1	1 3/4	BLACK	13		
41628	CRA 20-10	2/0	1/0					
41684	CRA 30-4	4/0	#4	1 3/4	PURPLE	15		
41681	CRA 30-10		1/0					
41682	CRA 30-20		2/0					
41646	CRA 40-6		#6					
41644	CRA 40-4		#4					
41645	CRA 40-2		#2					
41640	CRA 40-1	#1	2/0	YELLOW	16			
41641	CRA 40-10	1/0						
41642	CRA 40-20	2/0						
41643	CRA 40-30	3/0						
41625	CRA 250-2	#2				2	WHITE	17/298
41620	CRA 250-1	#1						
41621	CRA 250-10	1/0						
41622	CRA 250-20	2/0						
41623	CRA 250-30	3/0						
41624	CRA 250-40	4/0						
41635	CRA 300-2	#2	2	RED	18/324			
41631	CRA 300-10	1/0						
41632	CRA 300-20	2/0						
41633	CRA 300-30	3/0						
41634	CRA 300-40	4/0						
41636	CRA 350-20	2/0				2 1/4	BROWN	20/299
41637	CRA 350-40	4/0						
41638	CRA 350-250	250						
41639	CRA 350-300	300						
41656	CRA 500-6	#6	500	BROWN	20/299			
41654	CRA 500-4	#4						
41655	CRA 500-2	#2						
41650	CRA 500-1	#1						
41651	CRA 500-10	1/0						
41652	CRA 500-20	2/0						
41653	CRA 500-30	3/0	500	BROWN	20/299			
41670	CRA 500-40	4/0						
41671	CRA 500-250	250						
41672	CRA 500-300	300						
41673	CRA 500-350	350						
41674	CRA 500-400	400						
41665	CRA 600-500	600	500	2 1/4	GREEN	22/472		
41675	CRA 750-500	750	500	2 1/4	BLACK	24		
41676	CRA 750-600		600					
41607	CRA 1000-750	1000	750	3	WHITE	27		


Other sizes available, consult factory.




Copper wire only

Typical Applications


Also use in lugs, tees



Single CRA
in splice or lug

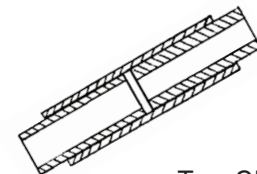

Two CRAs
if needed to
accommodate
wires

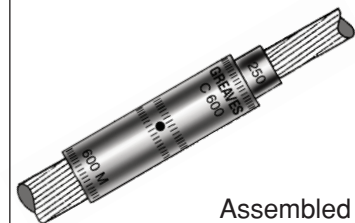

Assembled
User to provide wires