




For copper strap

GROUNDING FLEXIBLE STRAP SYSTEM



PIPE CLAMPS FOR FLEXIBLE STRAPS

For grounding flat flexible strap to fence posts, gates or water pipe
Bronze high-copper alloy castings

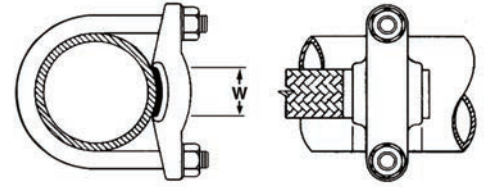

CF SERIES

NAED NUMBER	CATALOG NUMBER	PIPE SIZE IPS	STRAP MAX W (IN)	EST. SHIPPING	
				WEIGHT (lbs)	UNIT
25710	CF 101	1	1	0.57	EA
25712	CF 121	1 1/4	1	0.65	EA
25715	CF 151	1 1/2	1	0.72	EA
25720	CF 201	2	1	0.78	EA
25725	CF 251	2 1/2	1	0.95	EA
25730	CF 301	3	1	1.02	EA
25735	CF 351	3 1/2	1	1.16	EA
25740	CF 401	4	1	1.22	EA
25750	CF 501	5	1	1.79	EA
25760	CF 601	6	1	2.30	EA



FLEXIBLE JUMPER STRAP CONNECTORS

Use to absorb expansion, misalignment, or motion of equipment
Use with CF Series clamps to bond fencepost to gate
Flexible flat woven tin-plated copper braid
Seamless high-conductivity tin-plated copper flat ferrules



FJ SERIES

NAED NUMBER	CATALOG NUMBER	EQUIV. WIRE SIZE (APPROX)	NOMINAL AMP RATING*		NOMINAL DIMENSIONS			EST. SHIPPING	
			INDOOR	OUTDOOR	L	W	T	WEIGHT (lbs)	UNIT
26870	FJ 200-18N	#1 AWG	200	245	18	1	1/8	0.47	EA
26880	FJ 300-18N	3/0 AWG	340	405	18	1	3/16	0.86	EA
26890	FJ 400-18N	4/0 AWG	360	430	18	1	1/4	1.23	EA

* Ampacity varies with service conditions such as environment, airflow, orientation, temperature rise, etc.
NEMA bolt pattern for (2) 1/2" bolts on 1 3/4" centers.
Other configurations and sizes available; consult factory.



FENCE FABRIC GROUNDING CLAMPS

For grounding of fence fabric, barbed wire, and theft-deterrent wire
Accommodates two wires at nearly any angle
Electro-tin plated bronze body with stainless steel hardware



GFGC SERIES

NAED NUMBER	CATALOG NUMBER	CONDUCTOR SIZE (AWG)	DIMENSIONS		TORQUE (IN-LBS)	CTN QTY	EST. SHIPPING	
			DIA	H			WEIGHT (lbs)	UNIT
25918	GFGC8	#8 AWG	1	5/8	67	10	2	CTN
25916	GFGC6	#6 AWG	1	11/16	67	10	2	CTN
25914	GFGC4	#4 AWG	1	7/8	67	10	2	CTN
25912	GFGC2	#2 AWG	1	13/16	67	10	2	CTN
25920	GFGC20	#2/0 AWG	1-3/8	15/16	67	5	1.5	CTN
25924	GFGC240	#2 & 4/0 AWG	1-5/8	1	67	5	1.5	CTN

Also available with Tork-Away™ security hardware to assure required torque and provide tamper-resistance. Add suffix "TA" to catalog number and contact factory for availability.
Other sizes available, contact factory.





GROUNDING

ADJUSTABLE GROUND STRAPS

Adjustable ground straps are made from pure annealed copper

Bolts, nuts and washers are plated steel


Four sizes cover a ground pipe range of 3/8" to 4"

For copper wire #14-6SOL

Ground wire connection can be soldered or solderless

NAED NUMBER	CATALOG NUMBER	WATER PIPE SIZE (IPS)	CTN QTY	EST. SHIPPING	
				WEIGHT (lbs)	UNIT
HEAVY TYPE .050" THICK, 3/4" WIDE					
26000	D 480	3/8 - 1	50	5.14	CTN
26010	D 481	3/8 - 2	50	7.26	CTN
26020	D 482	3/8 - 3	25	4.76	CTN
26030	D 483	3/8 - 4	25	5.65	CTN
LIGHT TYPE .025" THICK, 3/4" WIDE					
26040	D 484	3/8 - 1	50	3.76	CTN
26050	D 485	3/8 - 2	50	4.50	CTN
26060	D 486	3/8 - 3	25	2.76	CTN
26070	D 487	3/8 - 4	25	3.50	CTN

PLATING: For tin plating add suffix letter "P" to CATALOG NUMBERS.

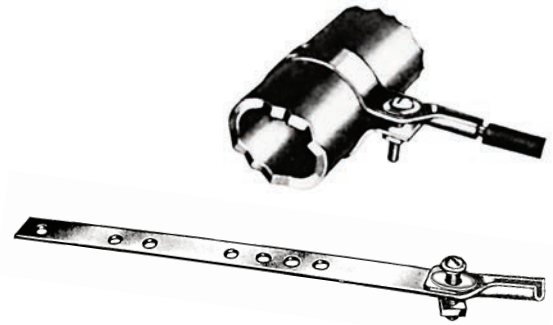

PERFORATED COPPER STRAP

Pure annealed 16 guage copper

Holes accommodate 1/4" screws, spaced 1/2" on center

Strap has full round edge

NAED NUMBER	CATALOG NUMBER	WIDTH (IN)	THICKNESS (IN)	COIL LENGTH	EST. SHIPPING	
					WEIGHT (lbs)	UNIT
70550	D 050	3/4	.050	10 FT	1.25	COIL

For longer coils consult factory for availability.



FLEXIBLE BRAID

Flexible flat-woven tin-plated copper braid

Use to absorb expansion, misalignment, motion, or vibration of equipment

Use for bonding or grounding jumpers

Use multiple layers to increase ampacity



FB SERIES

NAED NUMBER	CATALOG NUMBER	CIRCULAR MIL AREA	EQUIV. WIRE SIZE (APPROX)	NOMINAL AMP RATING*		DIMENSIONS		COIL LENGTH	EST. SHIPPING	
				INDOOR	OUTDOOR	W	T		WEIGHT (lbs)	UNIT
26810	FB60	9.6 kcmil	#10 AWG	40	60	1/2	1/32	250 FT	7.0	COIL
26815	FB90	24 kcmil	#6 AWG	72	90	1/2	3/32	250 FT	2.0	COIL
26820	FB200	77 kcmil	#1 AWG	200	245	1	1/8	10 FT	2.5	COIL
26830	FB300	154 kcmil	3/0 AWG	340	405	1	3/16	10 FT	5.3	COIL
26840	FB400	231 kcmil	4/0 AWG	360	430	1	5/32	10 FT	7.6	COIL

* Ampacity varies with service conditions such as environment, airflow, orientation, temperature rise, etc.

Also available as finished connectors with endpads; see FJ Series.

Also available in bulk quantities.